

” ”

”

”

”

- ”

**3.**

**6.0**



---

<b>1</b>	<b>" - ".</b>	<b>4</b>
<b>1.1.</b>	.....	<b>4</b>
<b>1.2.</b>	<b>Oracle 10.2.0.4</b>	
"	- "	..... <b>4</b>
<b>1.3.</b>	<b>Oracle 10.2.0.4.</b>	<b>5</b>
	.....	
1.3.1.	Oracle 10.2.0.4.	..... <b>5</b>
1.3.2.	PLSQL Developer	..... <b>15</b>
1.3.3.	Oracle 10.2.0.4.	..... <b>15</b>
1.3.4.	Oracle 10.2.0.4	..... <b>22</b>
<b>1.4.</b>	.....	<b>27</b>
<b>1.5.</b>	.....	<b>28</b>

# 1.

"

- "

## 1.1.

- **INST\_ASM** - « - ».
- \* **DOC** - .
- \* **BAS** -
- \* asm.dfm -
- \* **EXE** - .
- \* **MZXLS** -
- XLS, DOC
- \* MainAsm.exe - « - »
- \* \*.bpl , \*.dll, \*.bas -
- \* MainAsm.ini - « -
- »
- \* **DLL** -
- \* **CNV** -
- \* **IZM** - .
- **ORACLE** - Oracle 10.2.0.4.
- \* ODAC101040.exe - Oracle 10.2.0.4
- \* plsqldev.6.0.5.931.exe - PLSQL Developer
- \* **Scripts** -

## 1.2.

### Oracle 10.2.0.4

" - "

« - »

Oracle

INST\_ASM

SQL Plus, Oracle

ORACLE,

:

INST\_ASM\scripts\\_start.sql, :

1. (ASM).
2. ( - ADM\_ASM\_ROLE, - USR\_ASM\_ROLE, - USR0\_ASM\_ROLE).
3. - (ADM\_ASM/asmkey),
4. - (USR\_ASM/usrkey)
5. c « - » (USR0\_ASM/usrkey) c
6. « », « - ».
7. « - » [root]/testsv/script/log,

Oracle

1 - 8.

**1.3.**

**Oracle 10.2.0.4.**

Oracle 10.2.0.4,

1. « »

Oracle 10.2.0.4

PLSQL

Developer.

2. « »

Oracle 10.2.0.4


**1.3.1.**

**Oracle 10.2.0.4.**

Oracle 10.2.0.4

ODAC101040.exe,  
setup.exe.

1-17

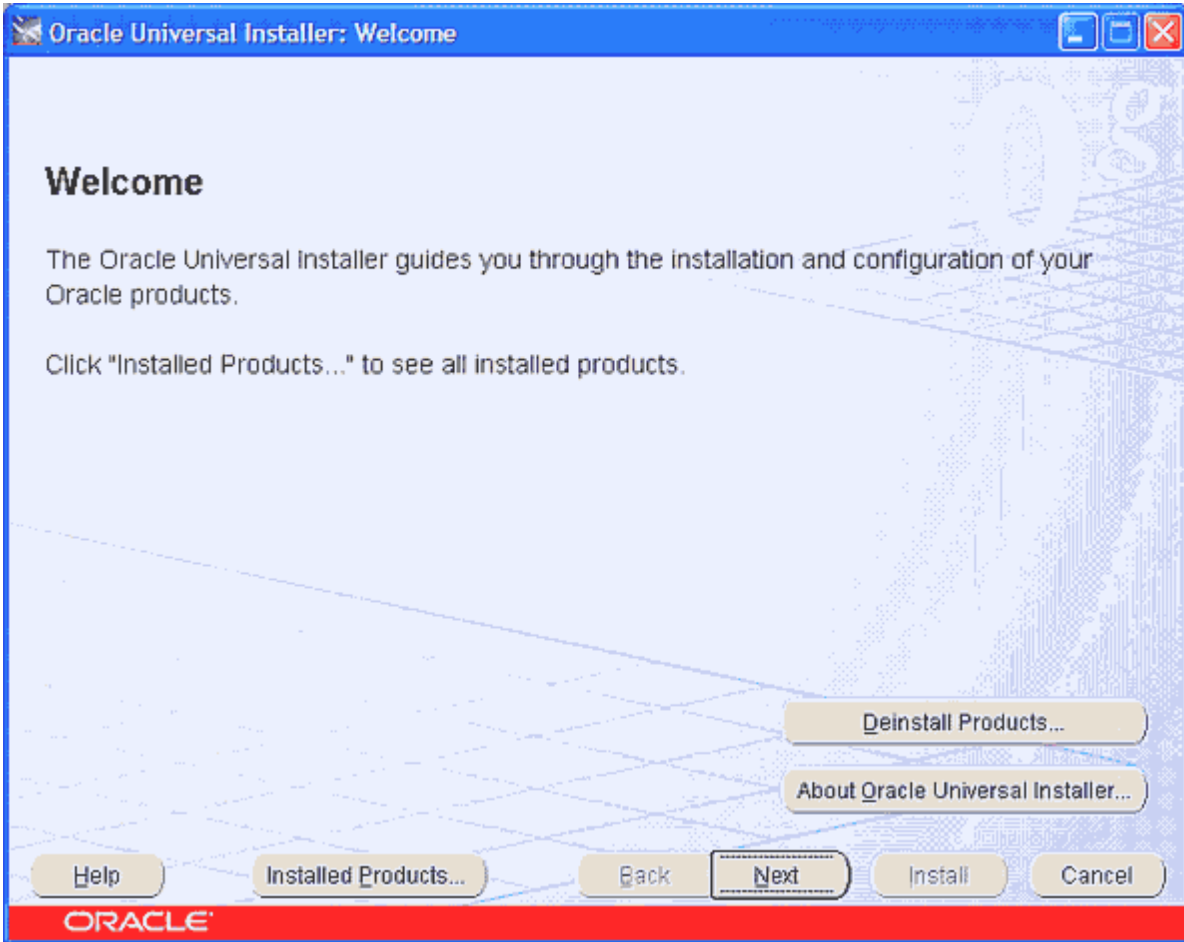

.1


!

3,

Oracle.

[

].

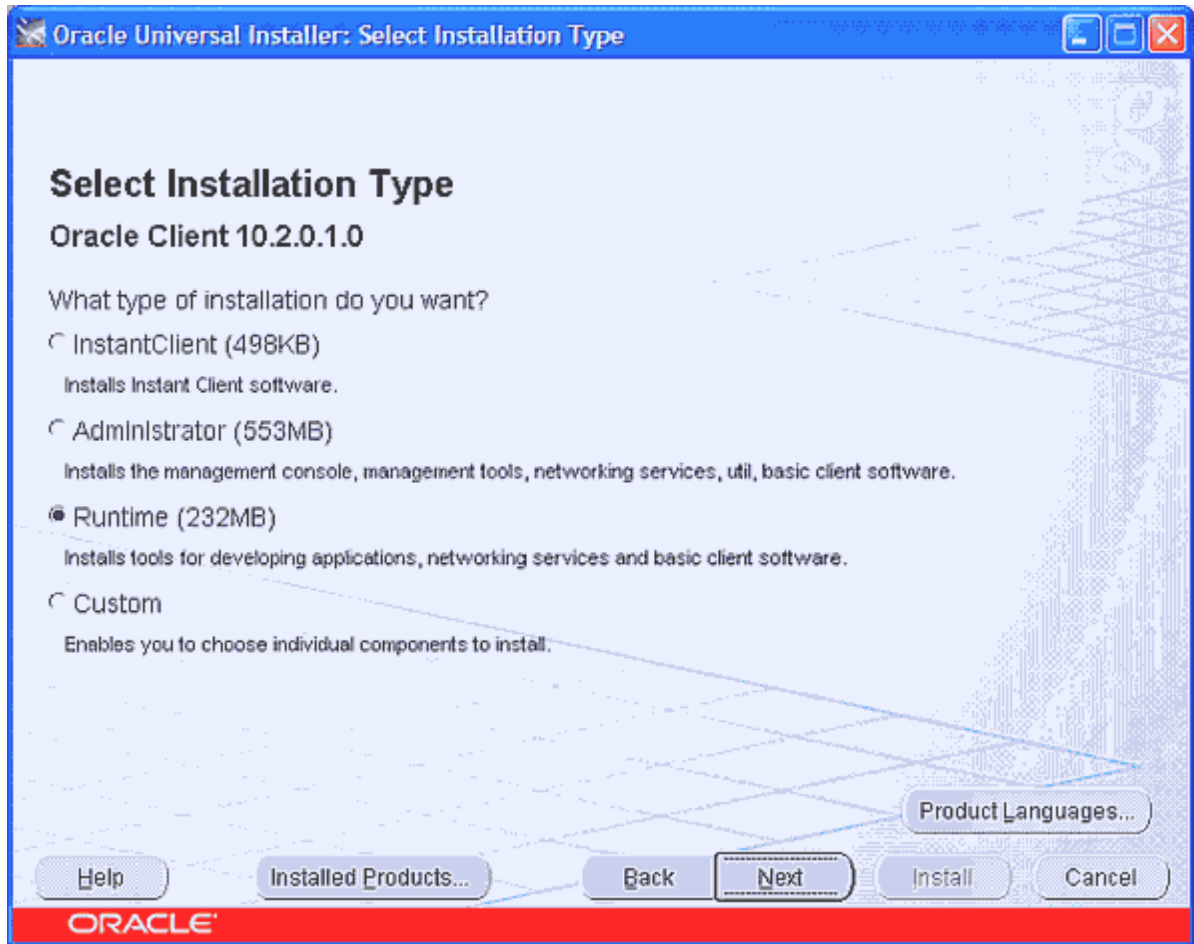

.2

10.2.0.4


-

D:\),


,

300

Oracle  
(

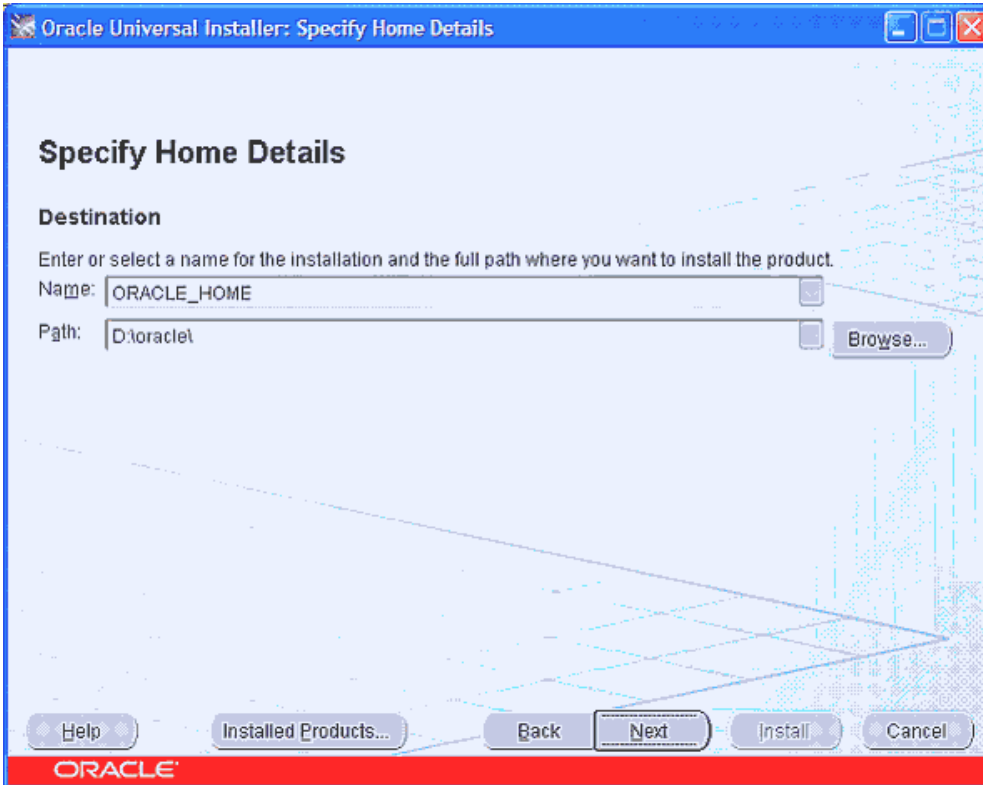


. 3

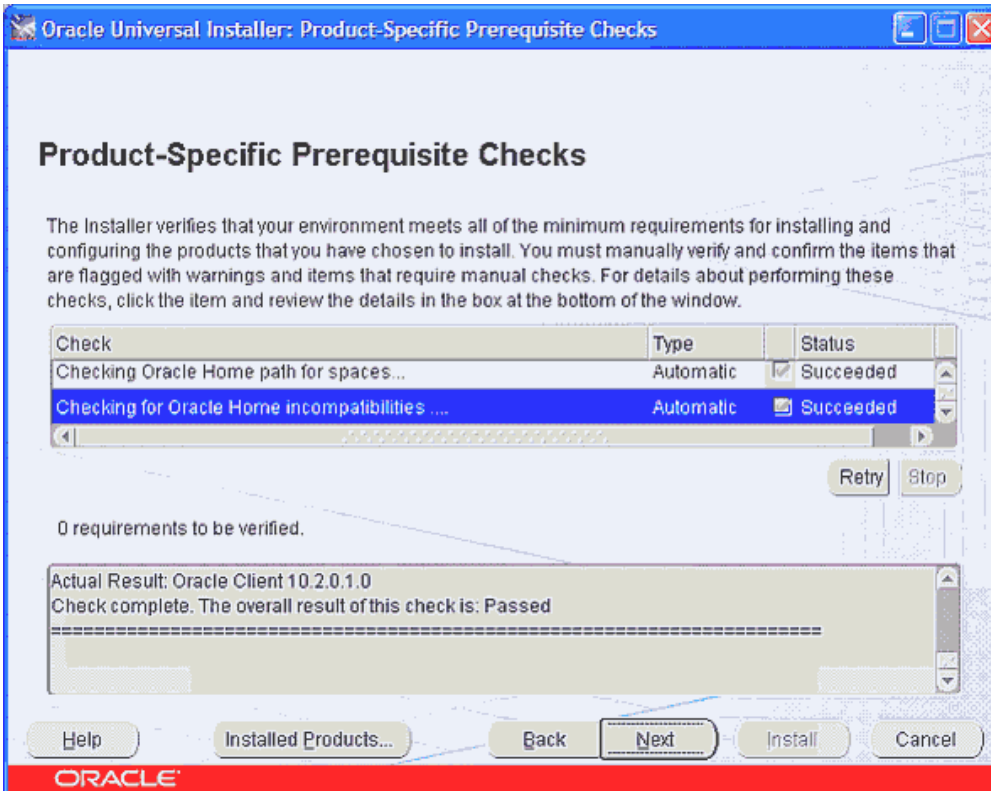


. 4

. 4.



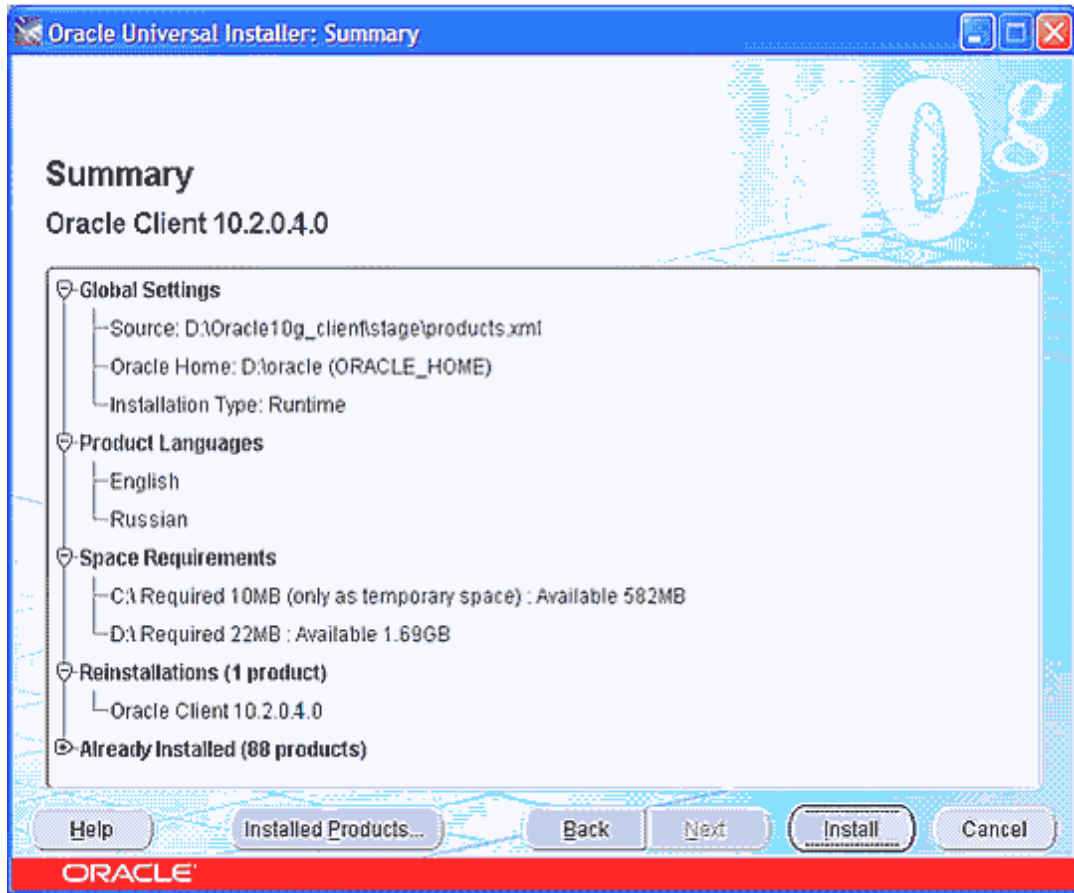


.5

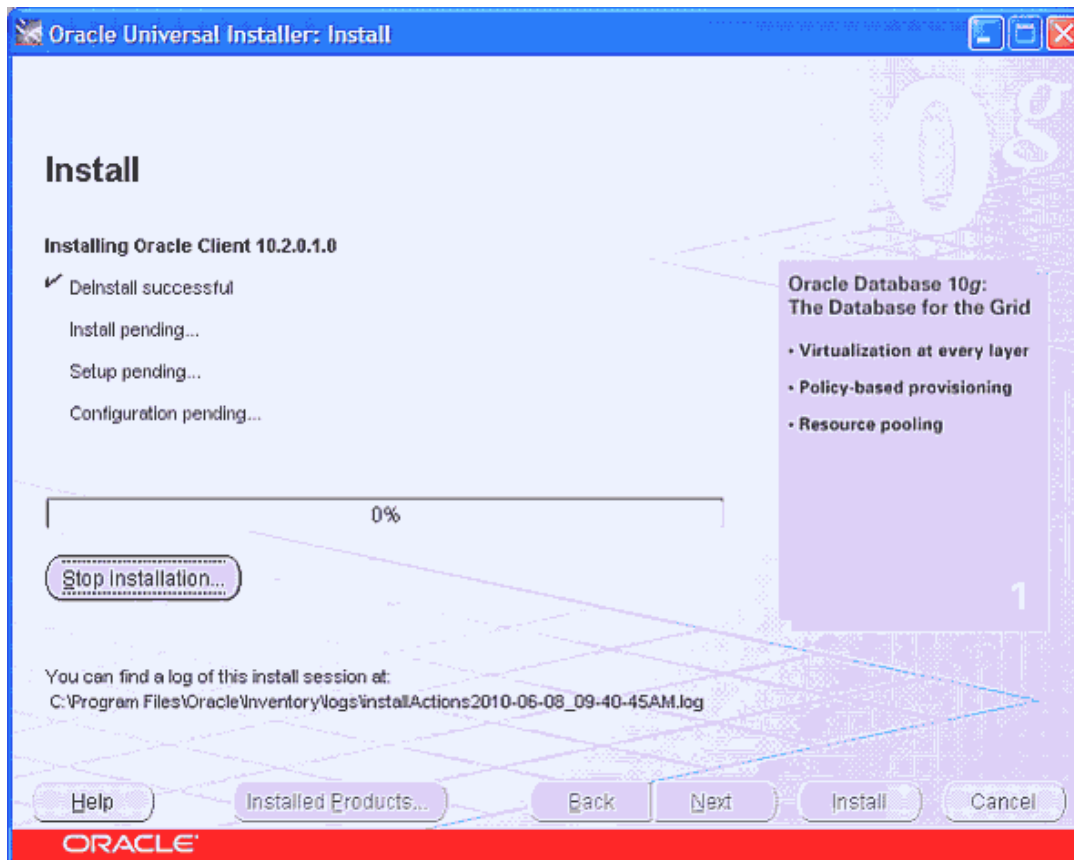


.6


## Configuration Assistant,

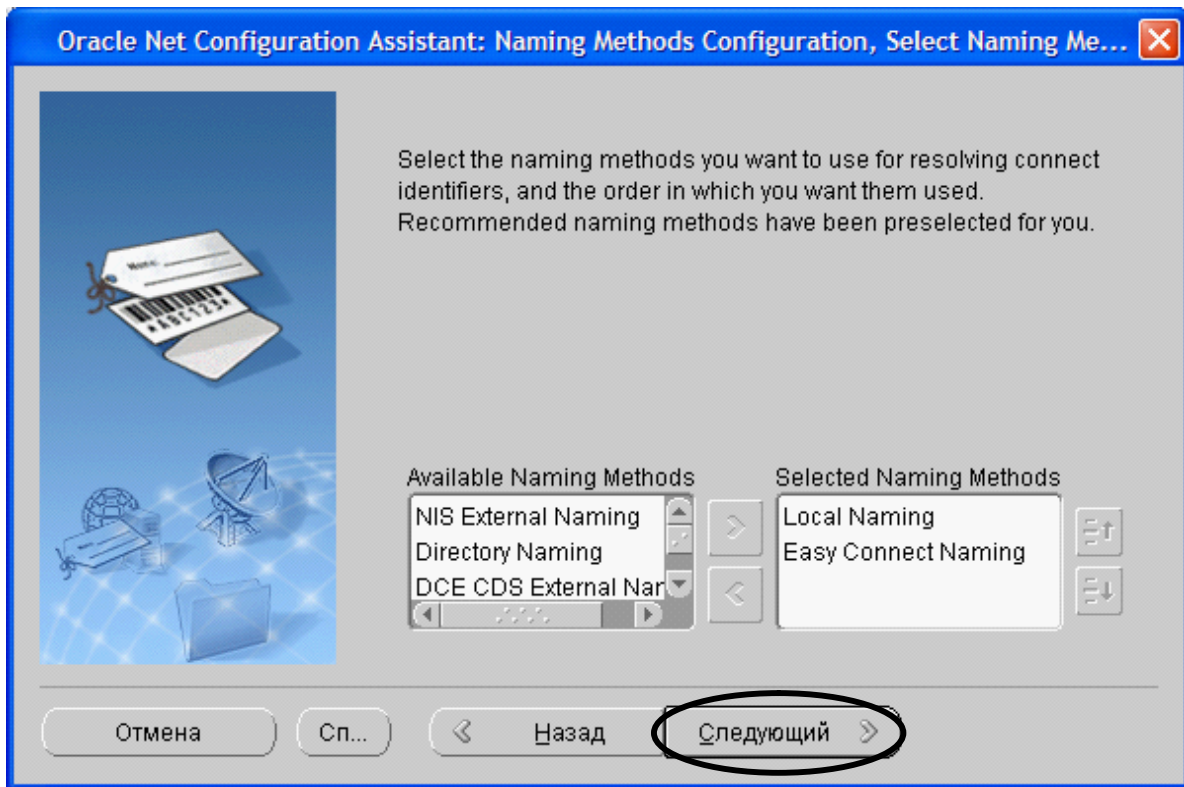


. 7

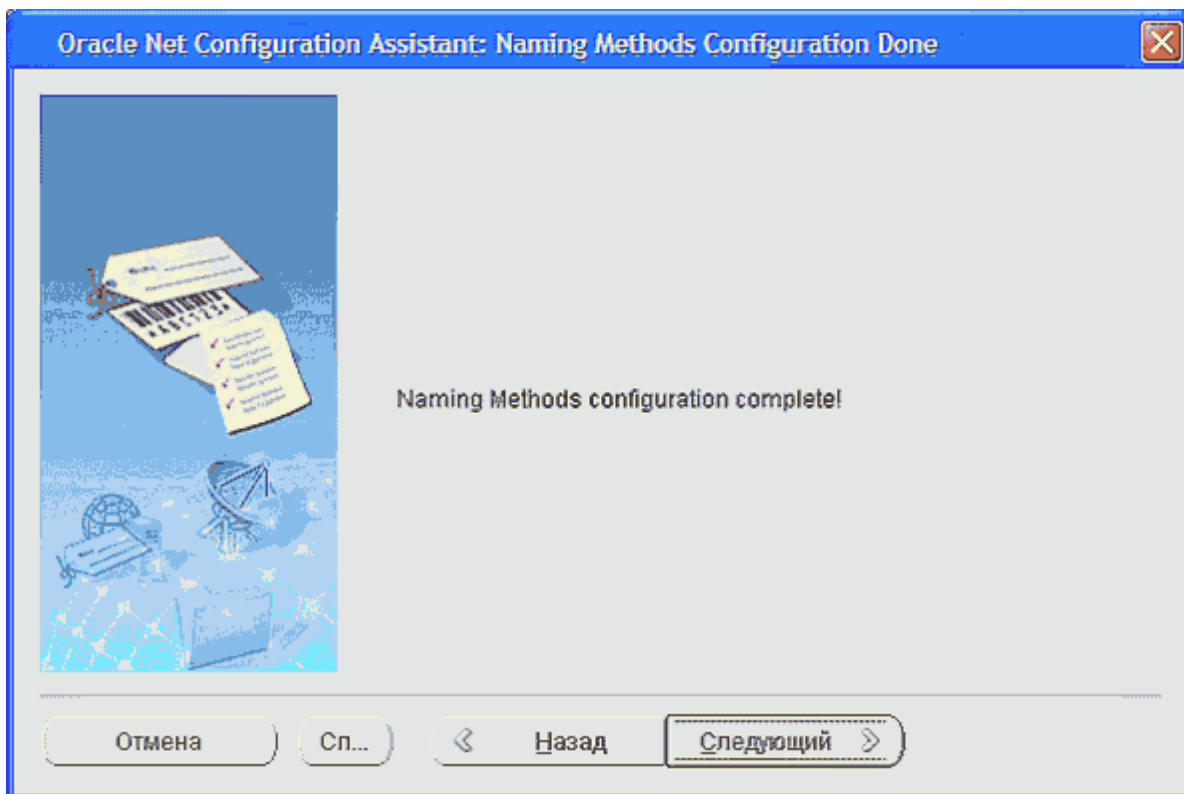

. 8

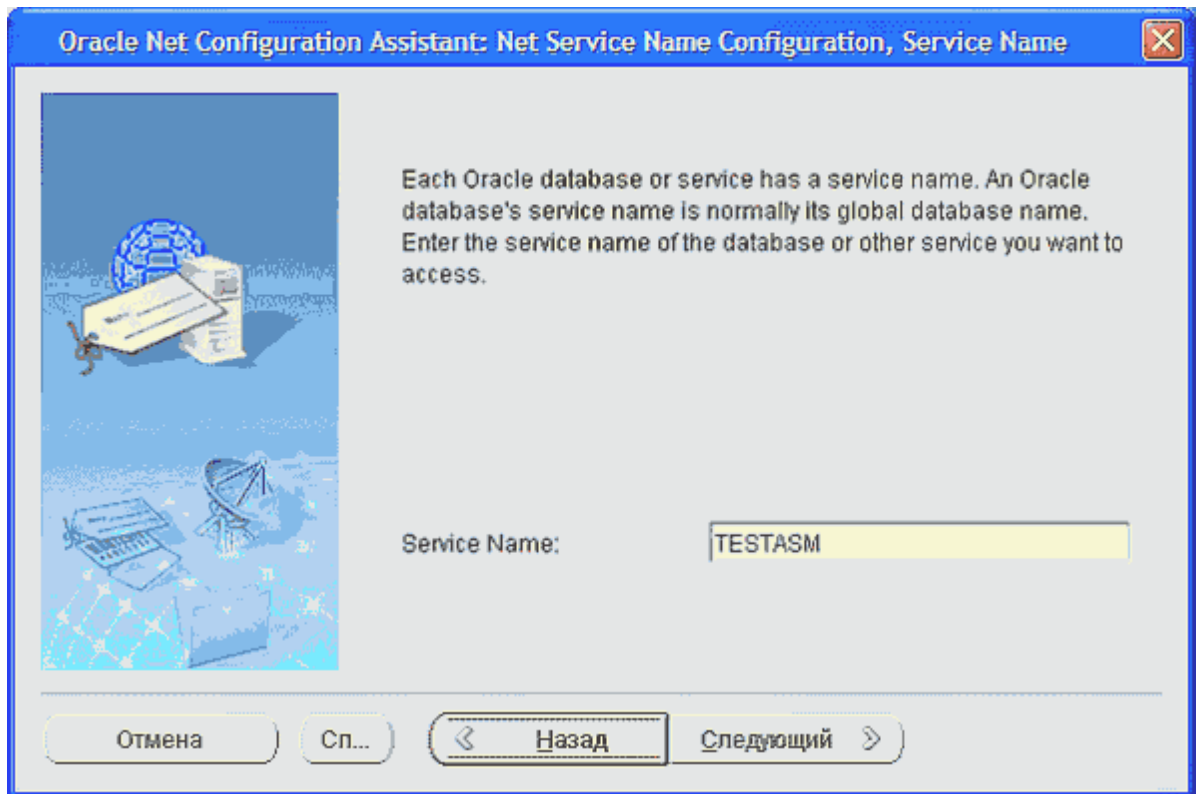


.9

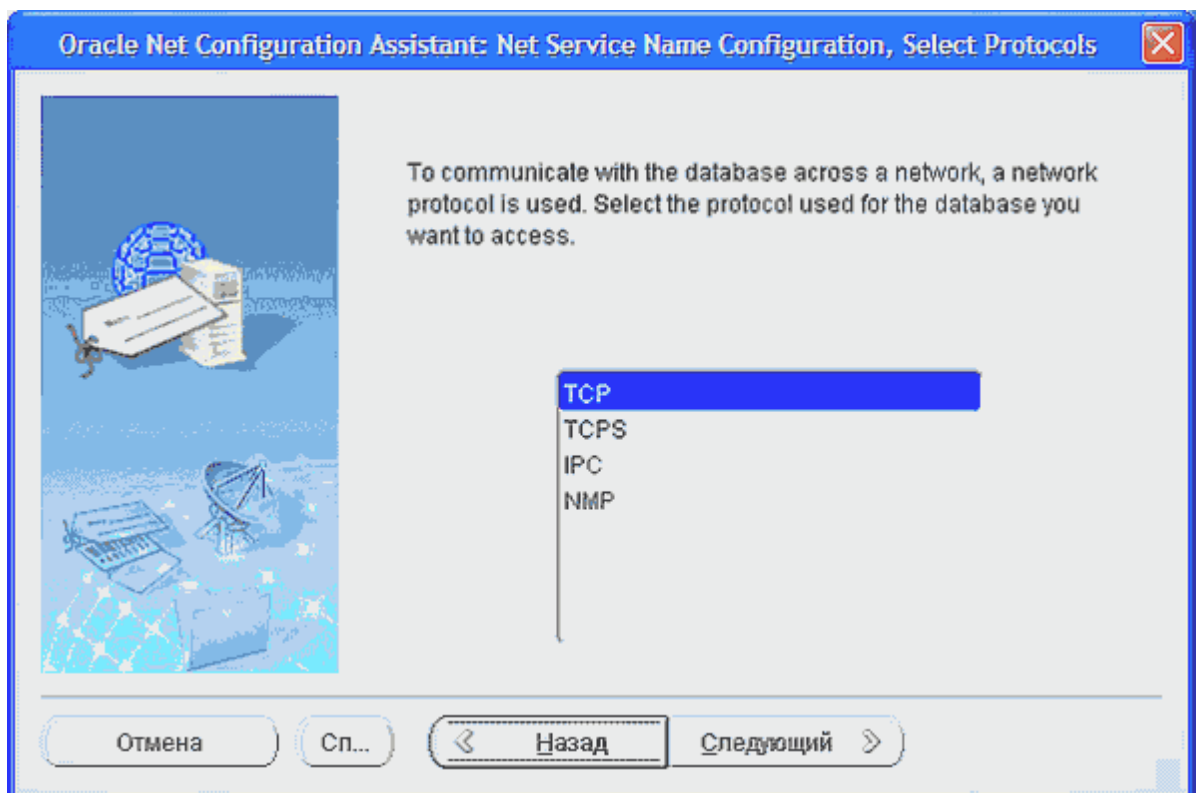


.10

.11


Oracle.

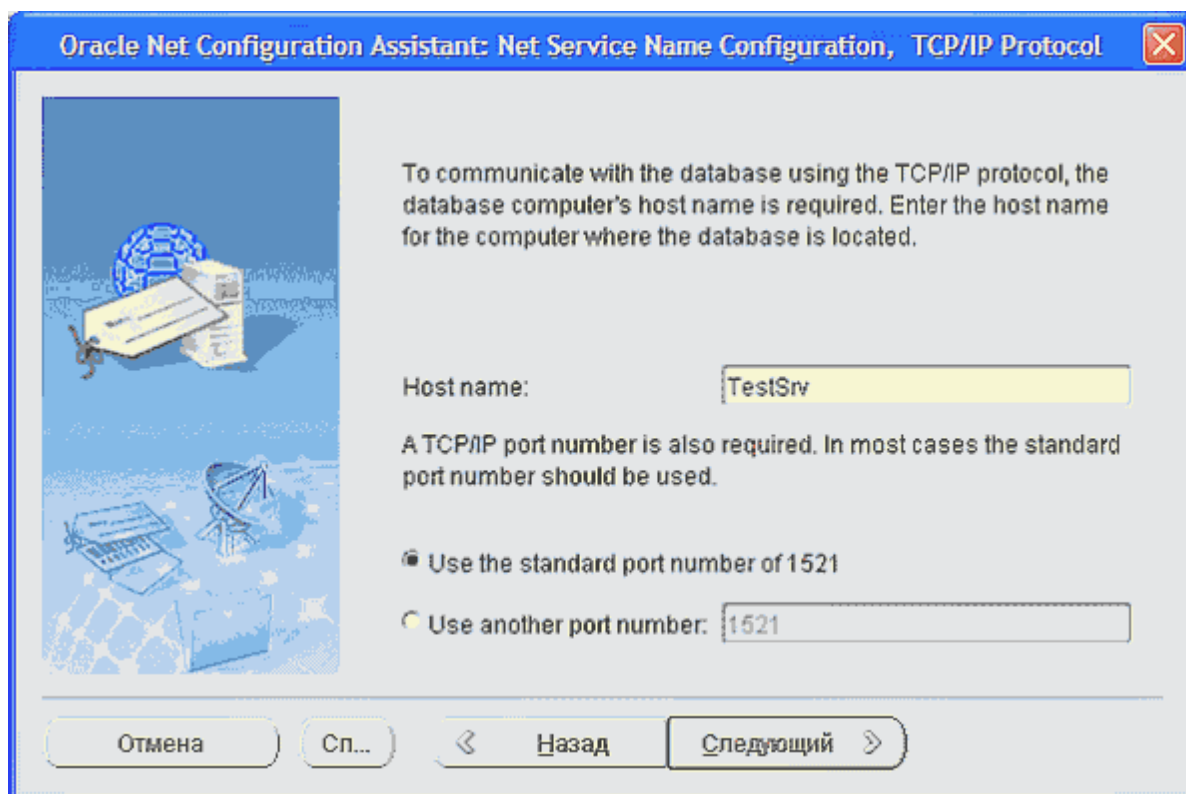

.11

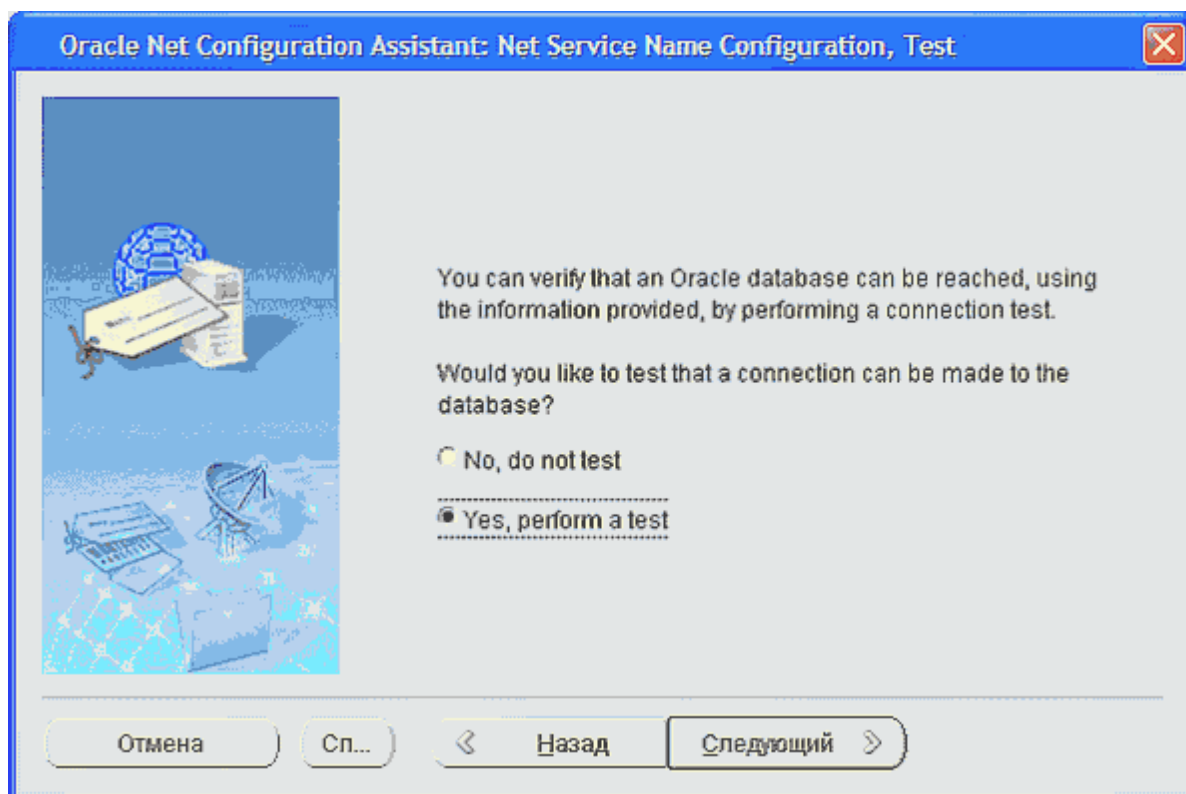


.12

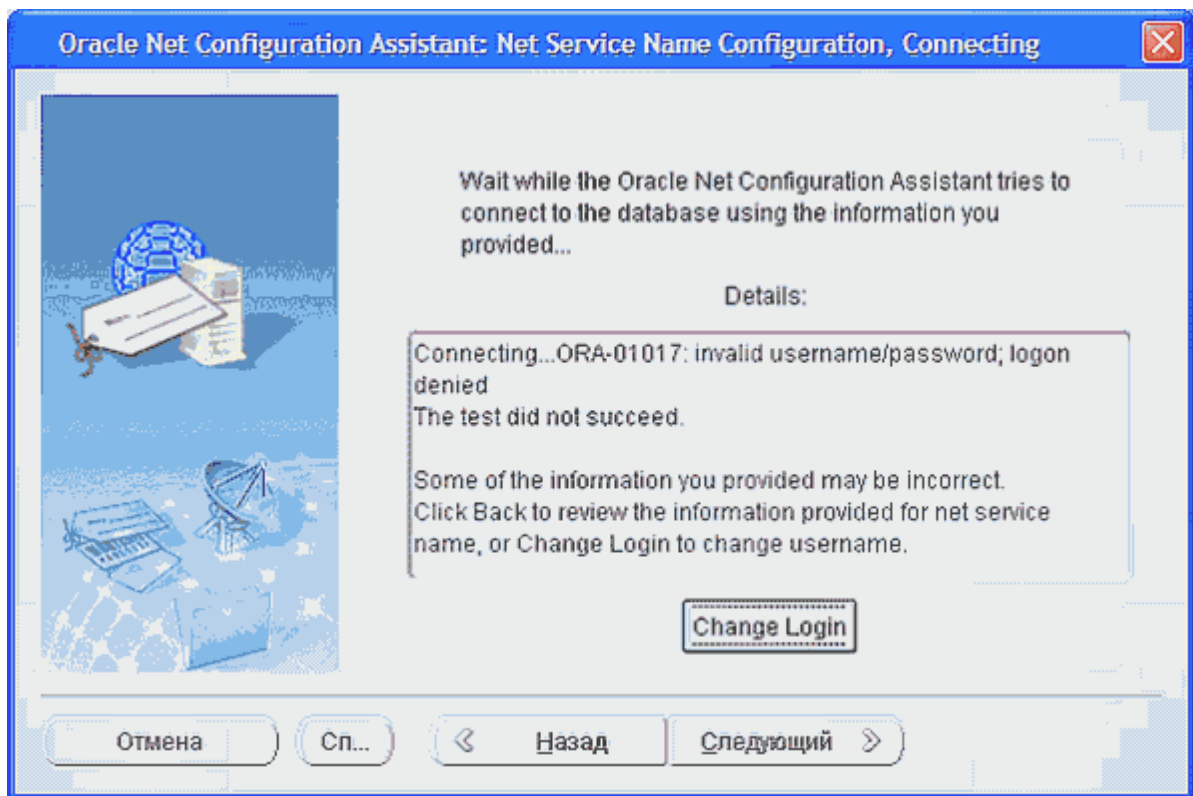


.13

. 14.

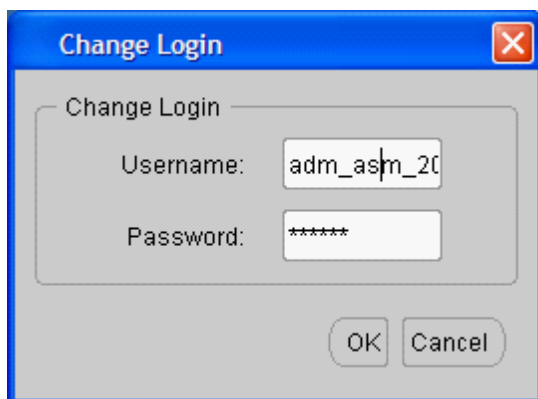


.14

15.

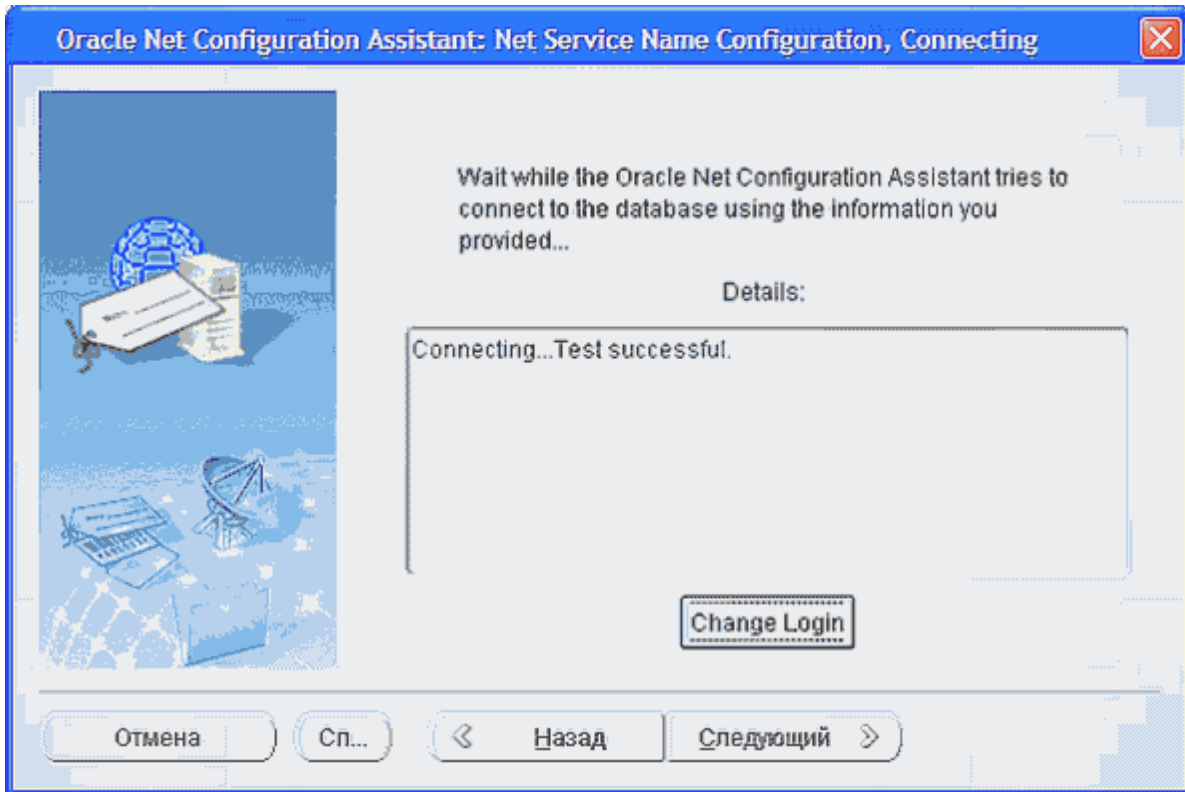

.15

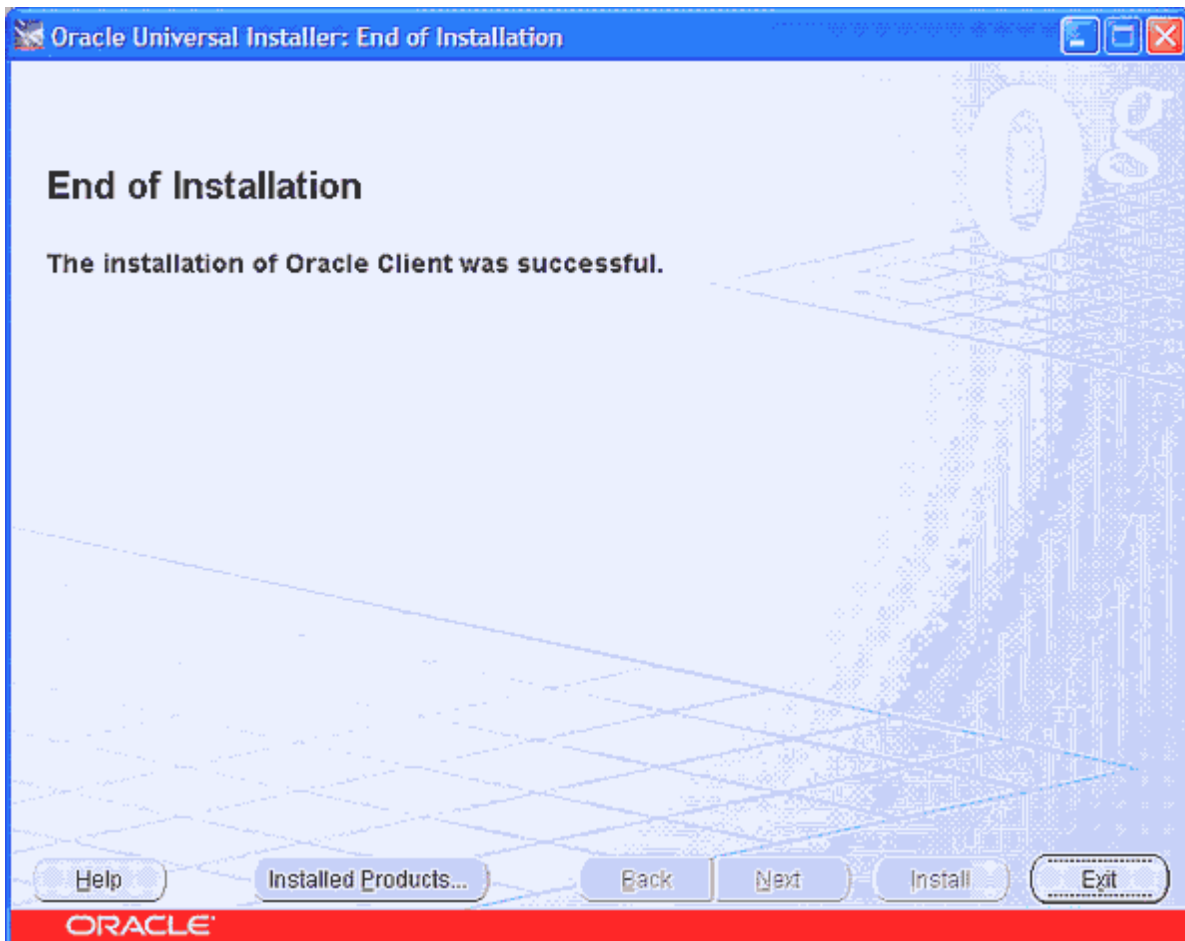

. 16



.17

### 1.3.2. PLSQL Developer

plsqldev.6.0.5.931.exe.

### 1.3.3. Oracle 10.2.0.4.

1. IP- ( testsrv).

2. , «

- » ( testasm).

3. , 1521.

4. Oracle-


PING.EXE.

Net Configuration Assistant


« » -> « » -> «Oracle-ORACLE\_HOME» ->

«Configuration and Migration Tools» -> «Net Configuration Assistant»  
( 18-31).



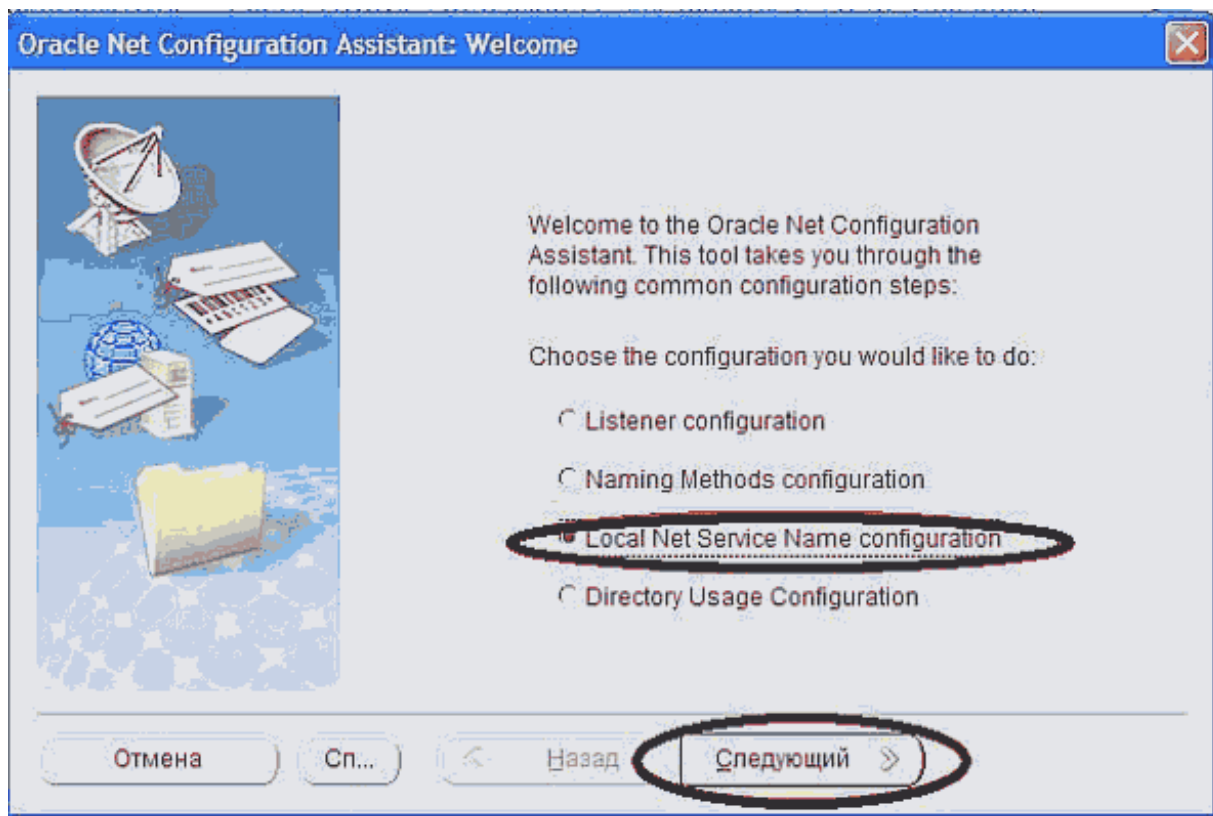


. 18

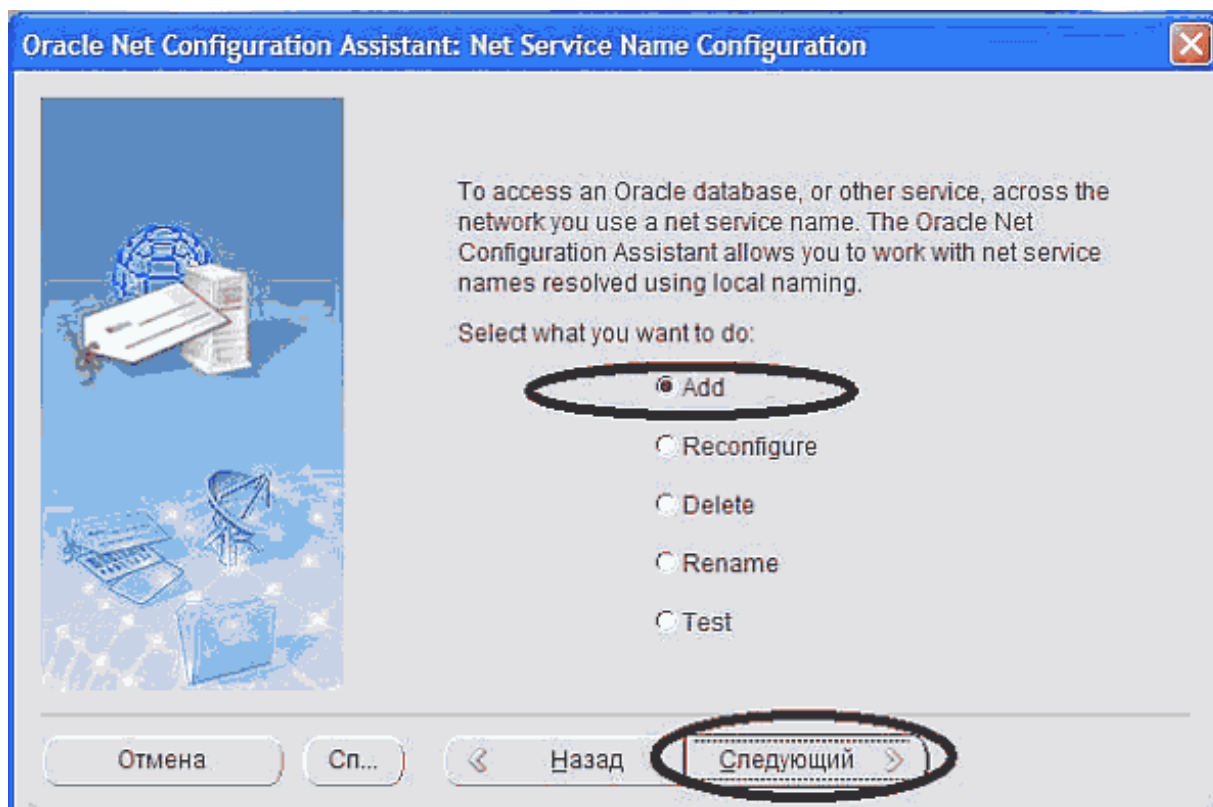


. 19



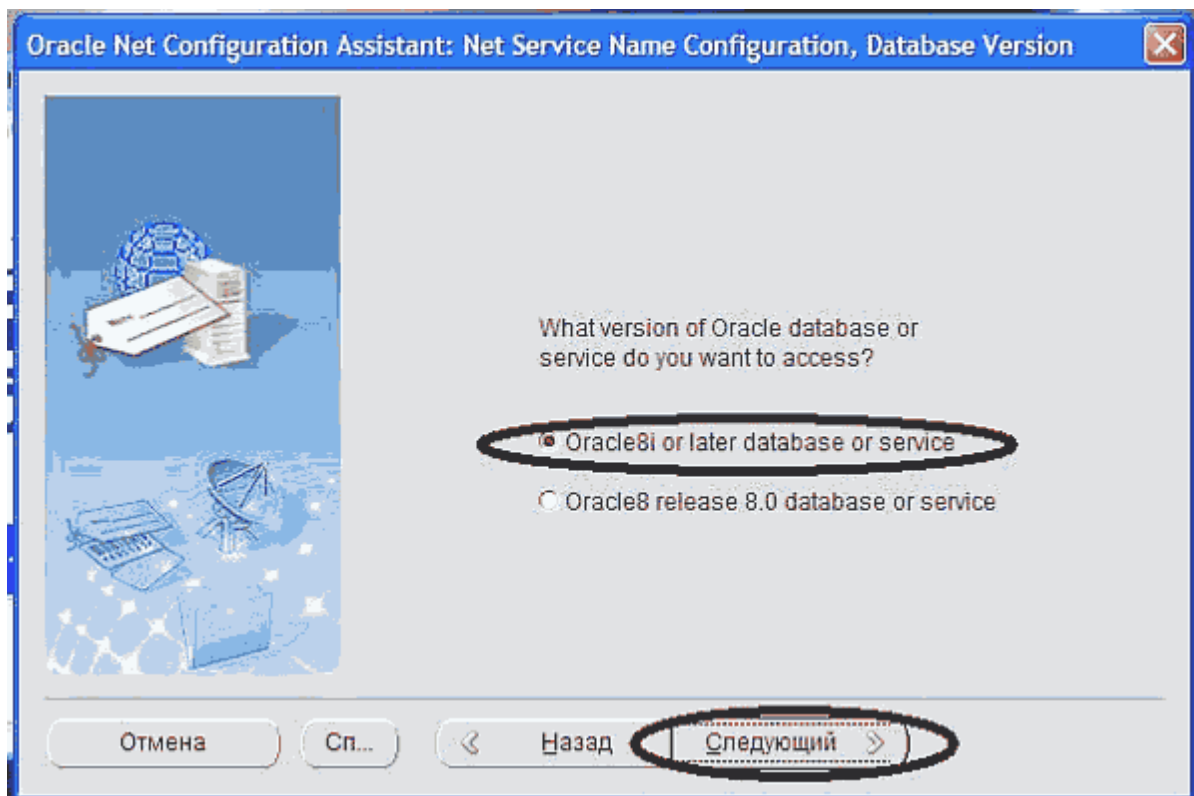


. 20

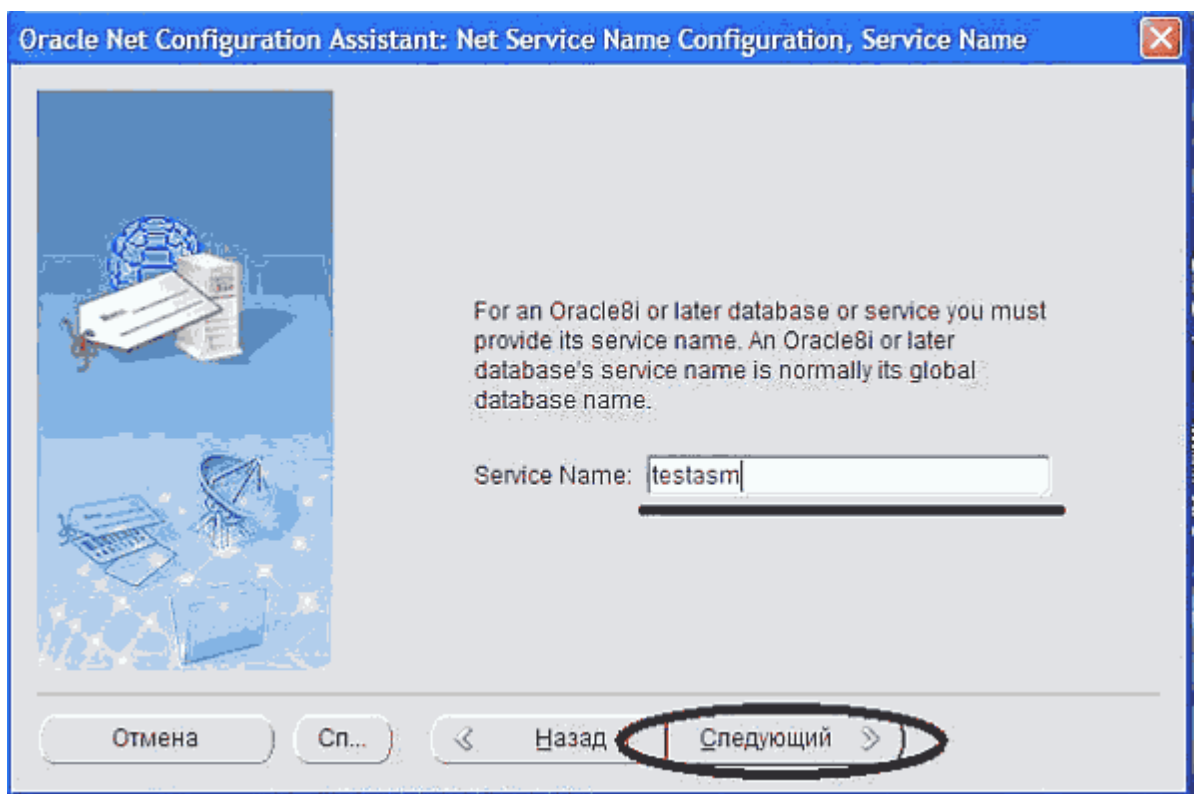


. 21

*testasm)*

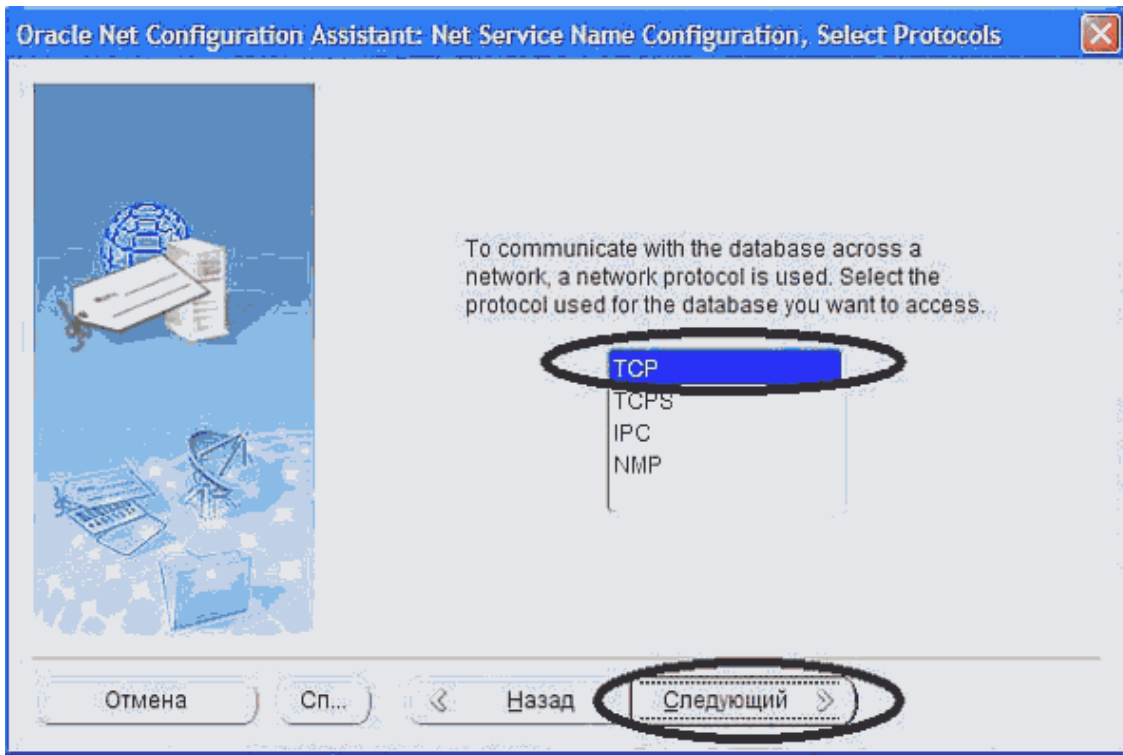


. 22

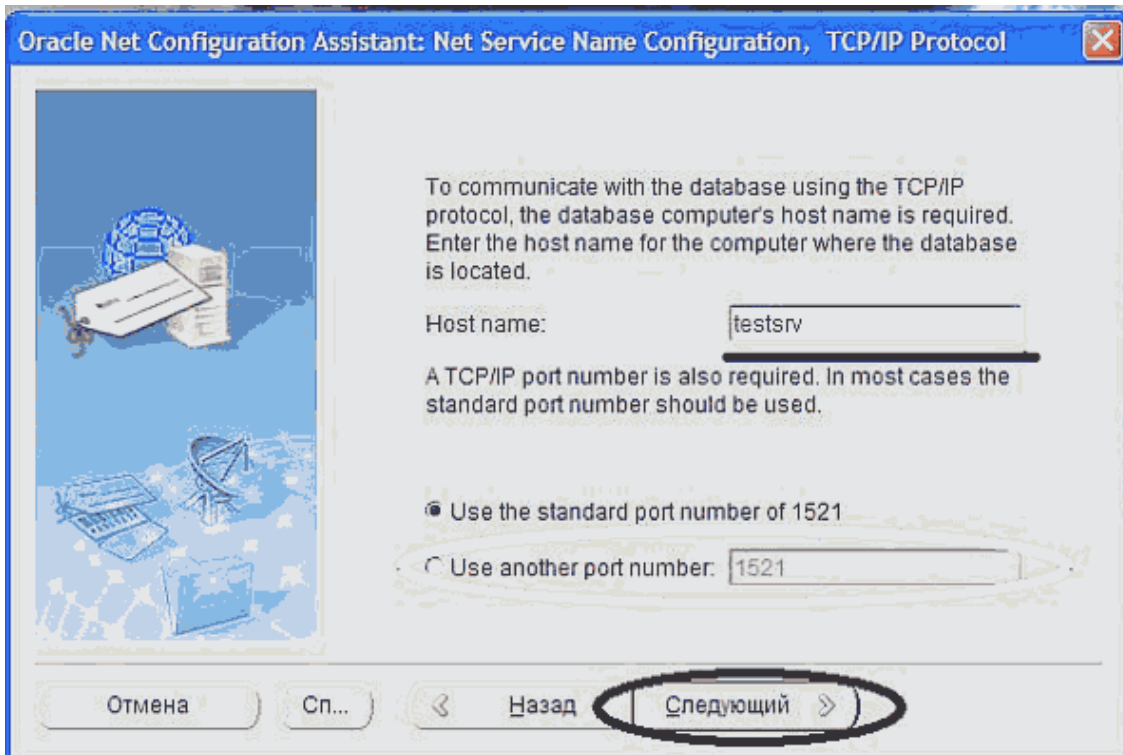

. 23


IP- ( Oracle testsrv). 1521,  
(

1521)

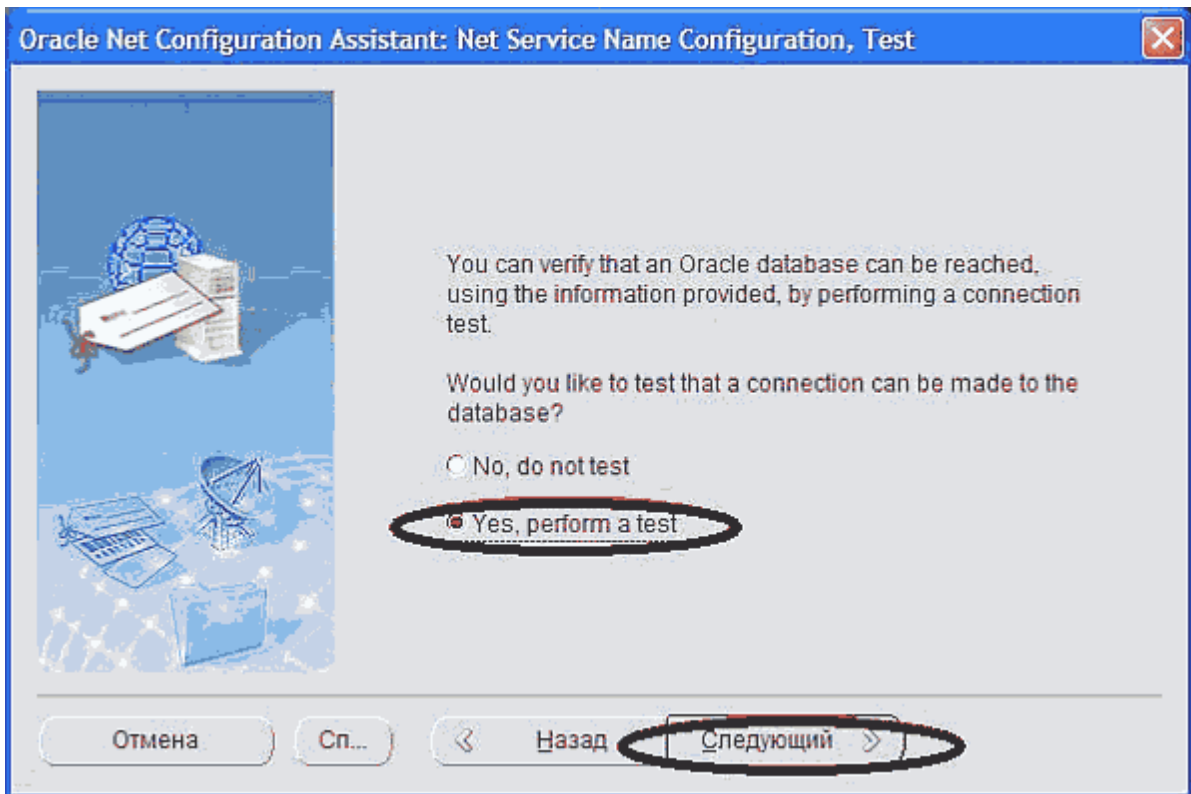

. 24

Oracle

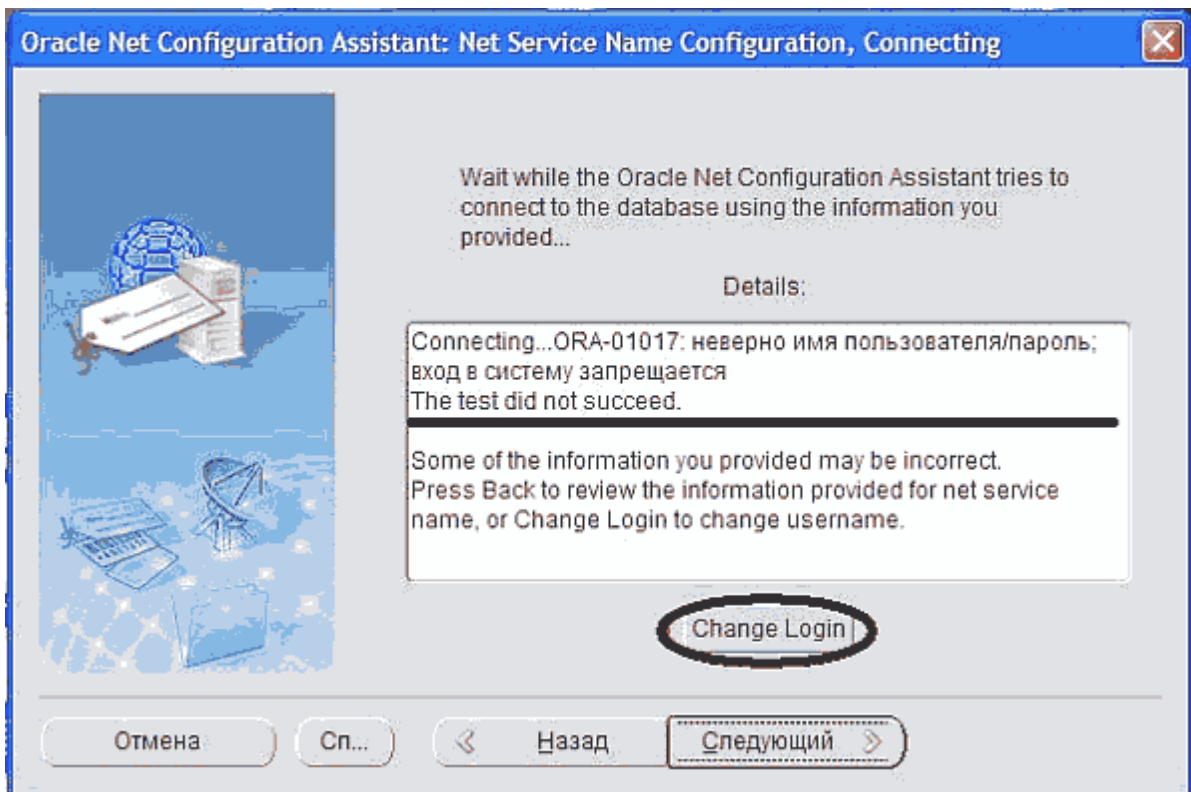


.25



. 26

«asmkey» OK. «adm\_asm», «Password» «Username»

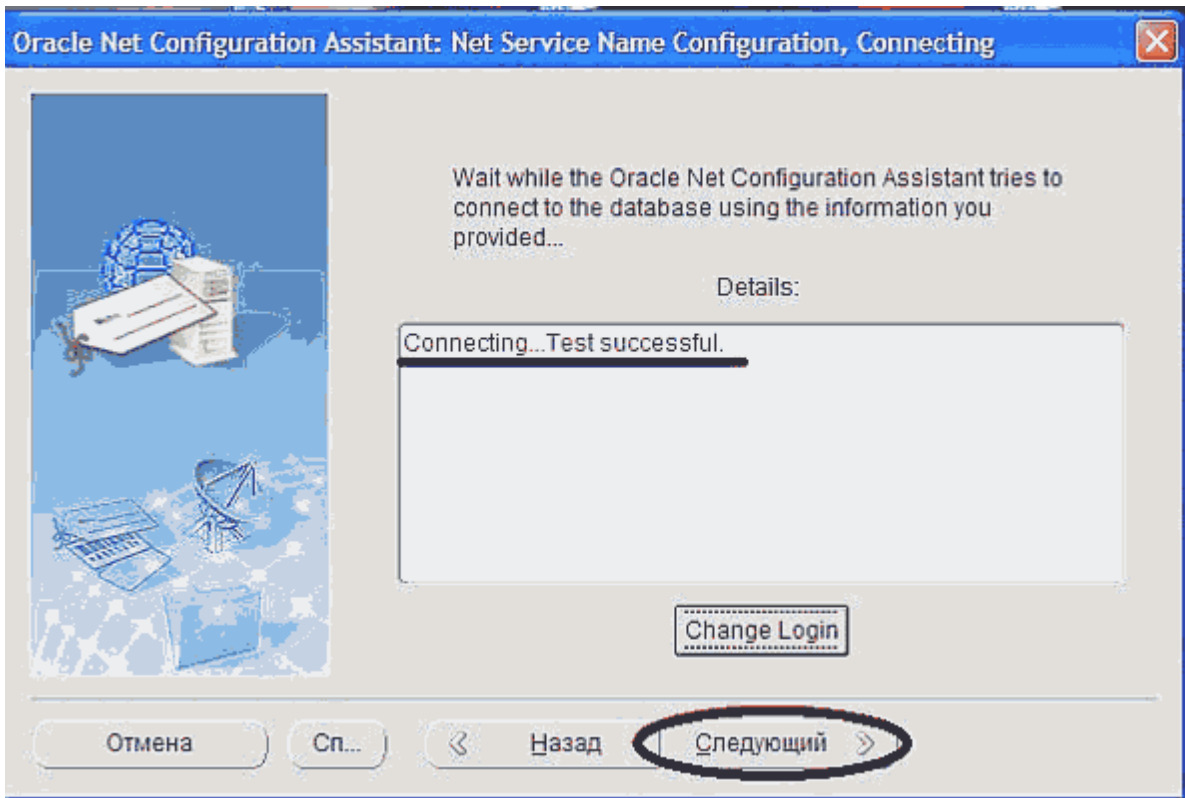


.27

Oracle. 27,


!

28.


[ ]

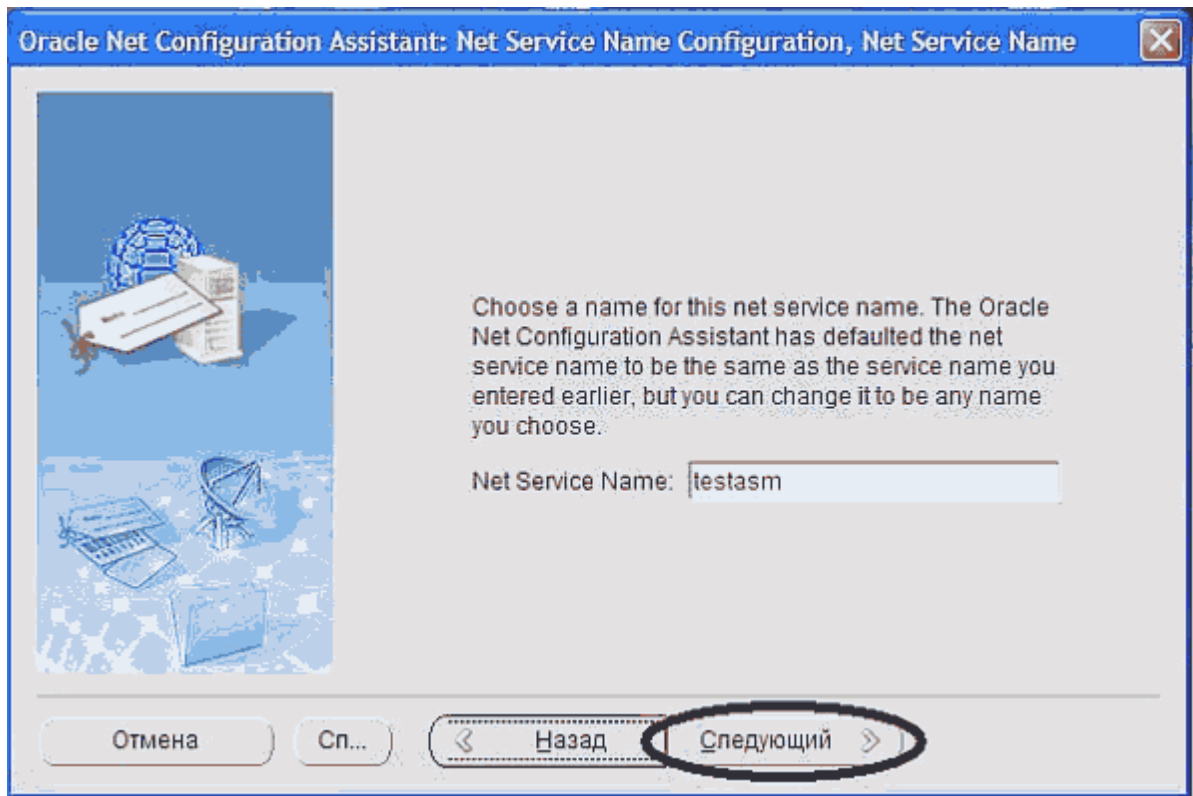

.28

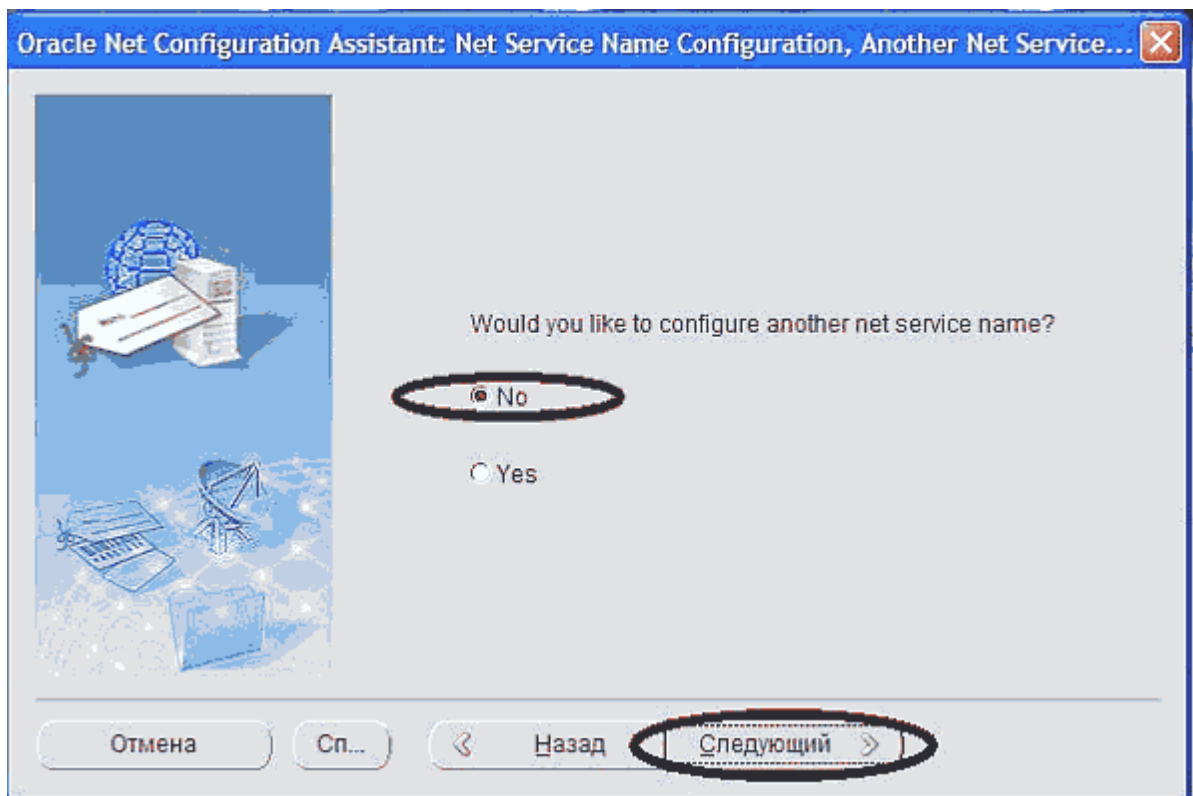

.29

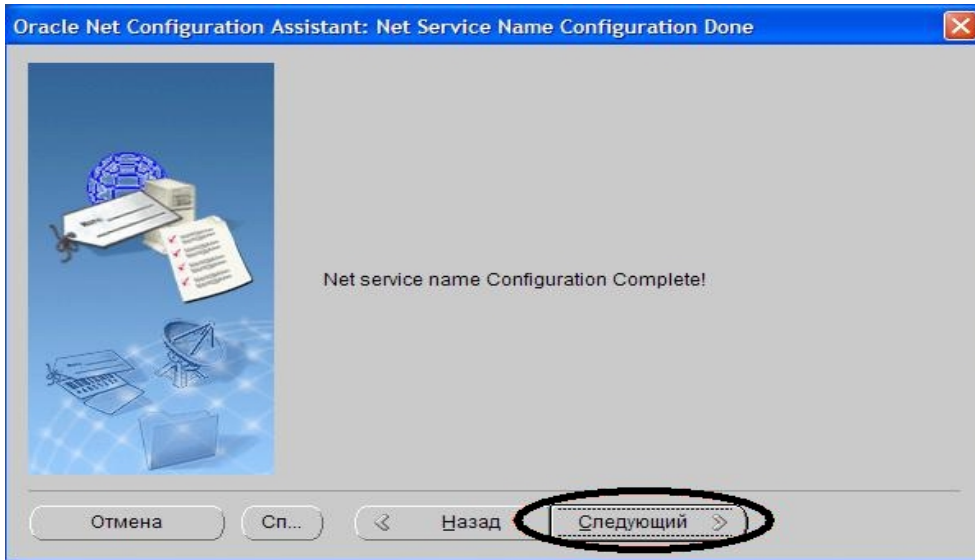

. 30



. 31

### 1.3.4.

### Oracle 10.2.0.4

ODAC101040.exe

C:\temp\

Disk1


Translations.

setup.exe,


, C:\temp\ Disk1\.

32-40.




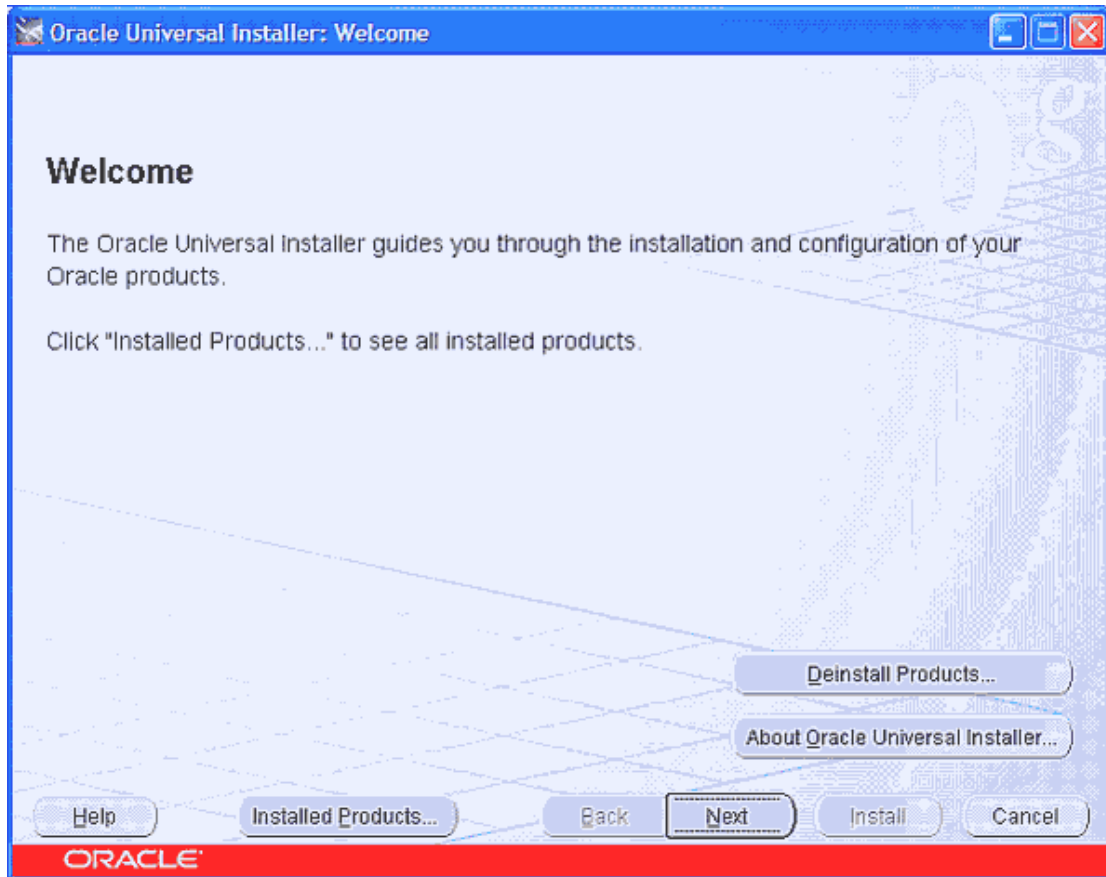


.32

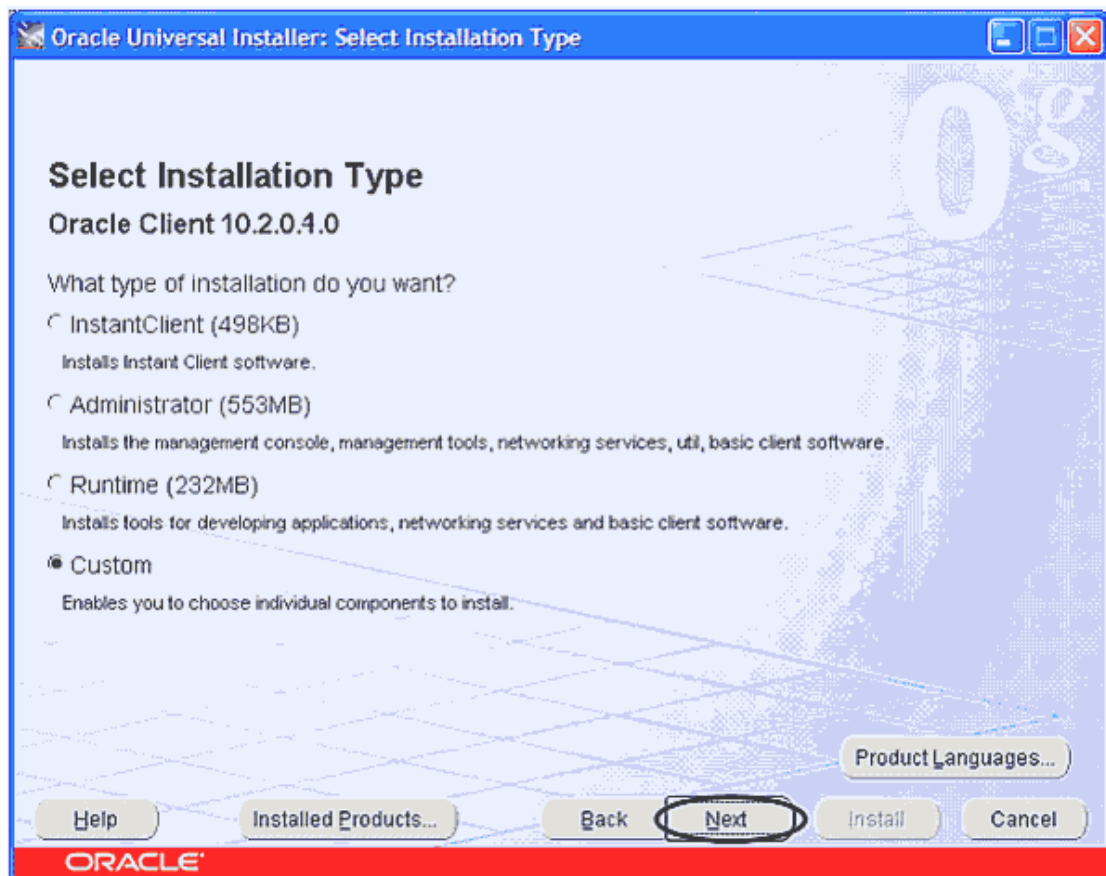

.33

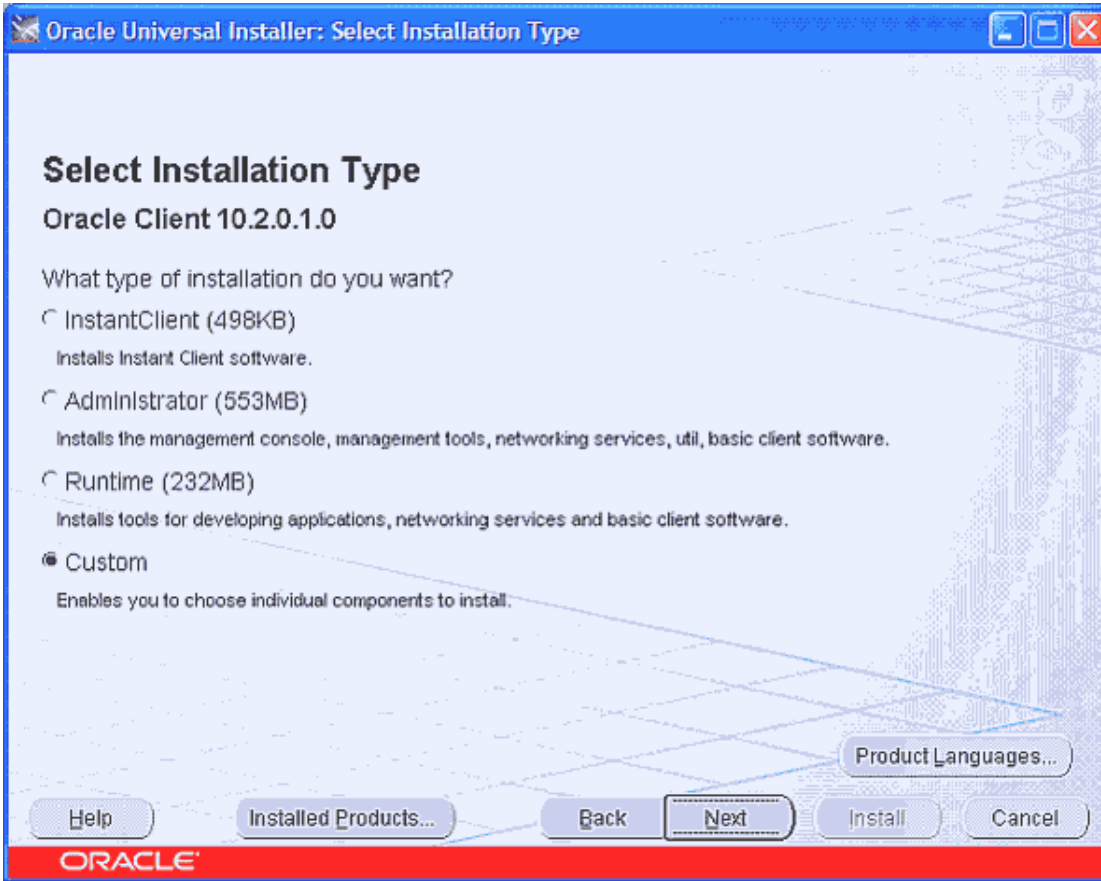


. 34

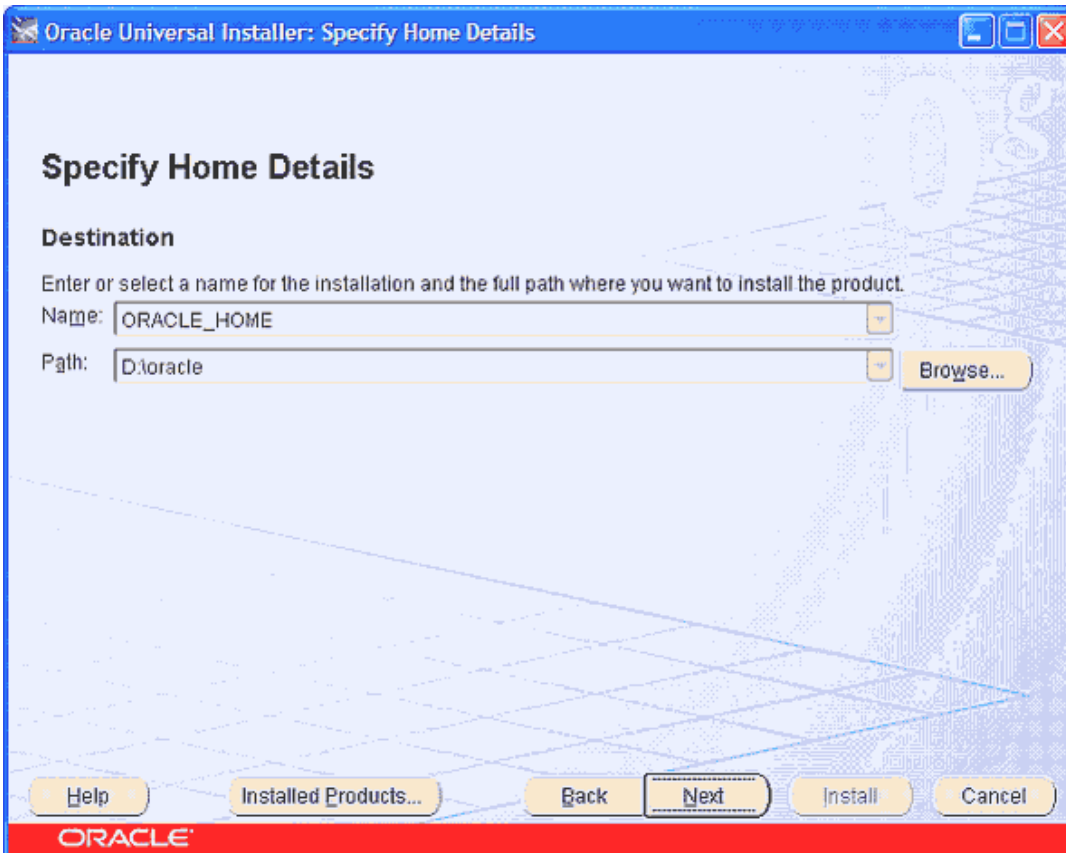


.35




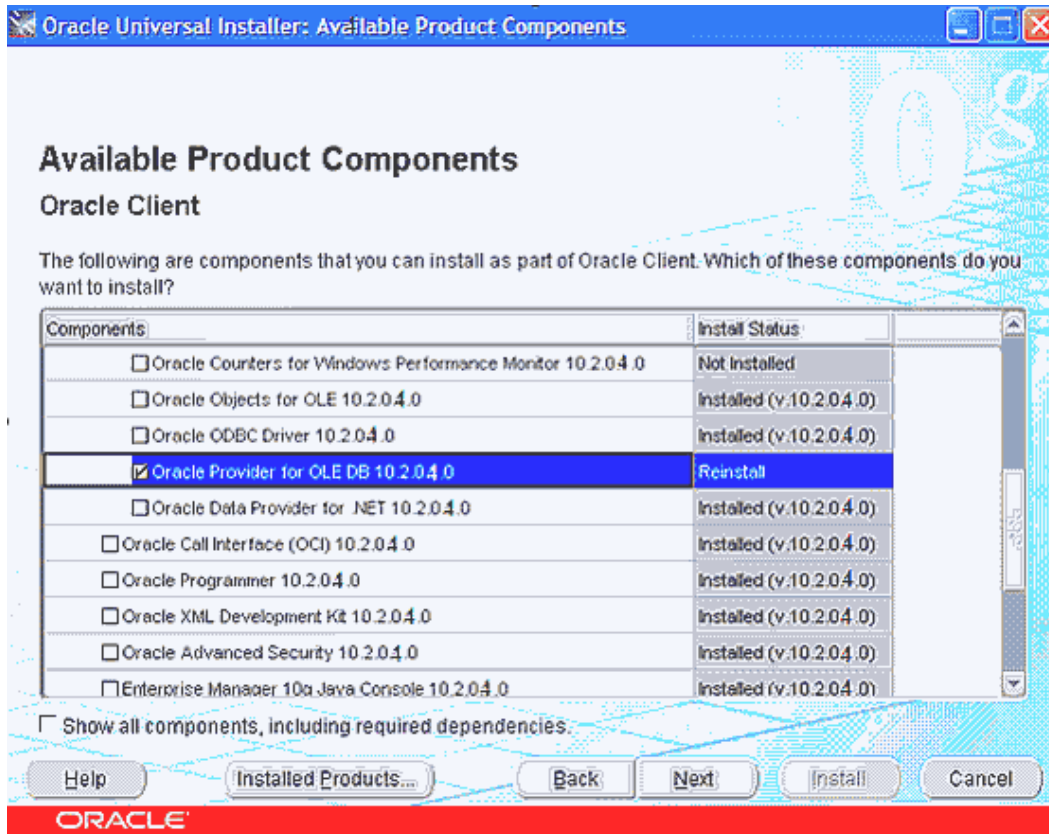


.36

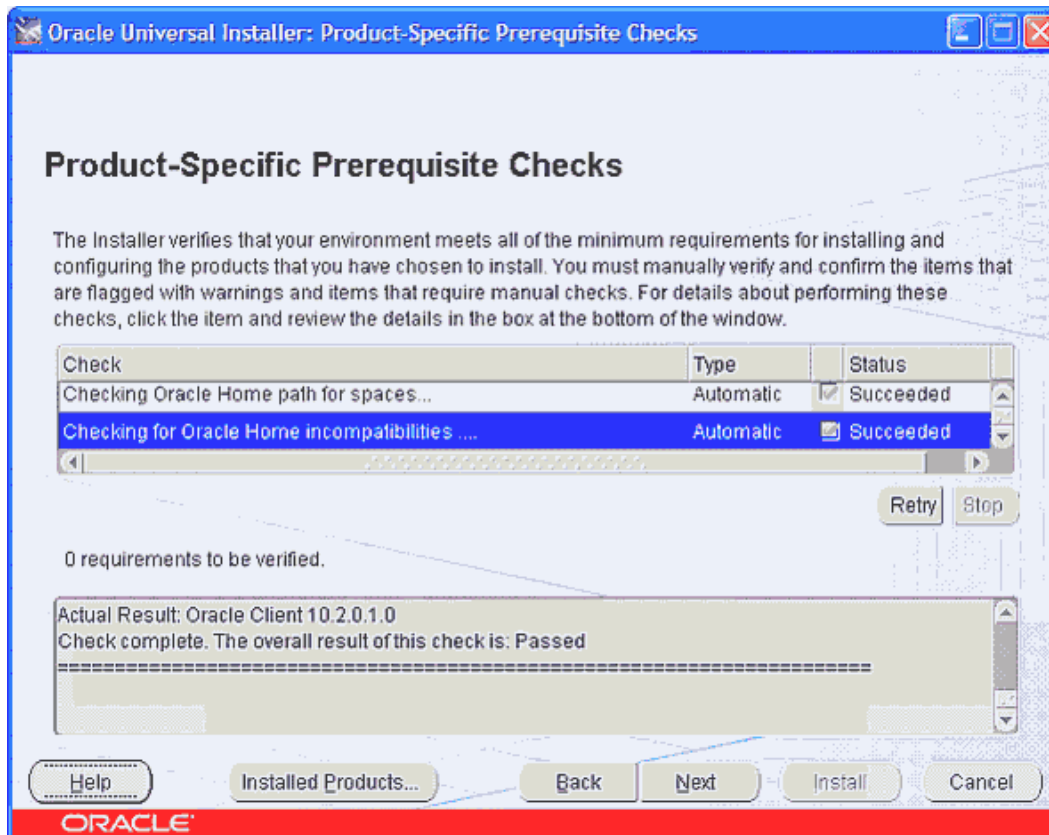

.37

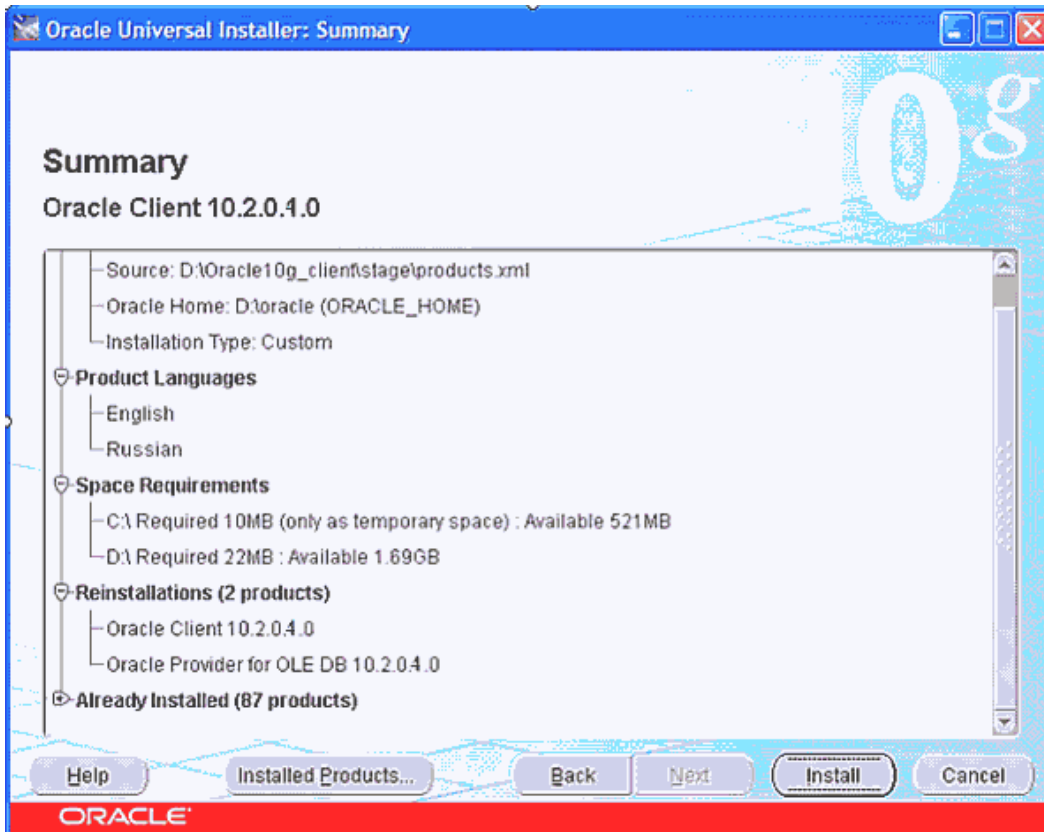

.38

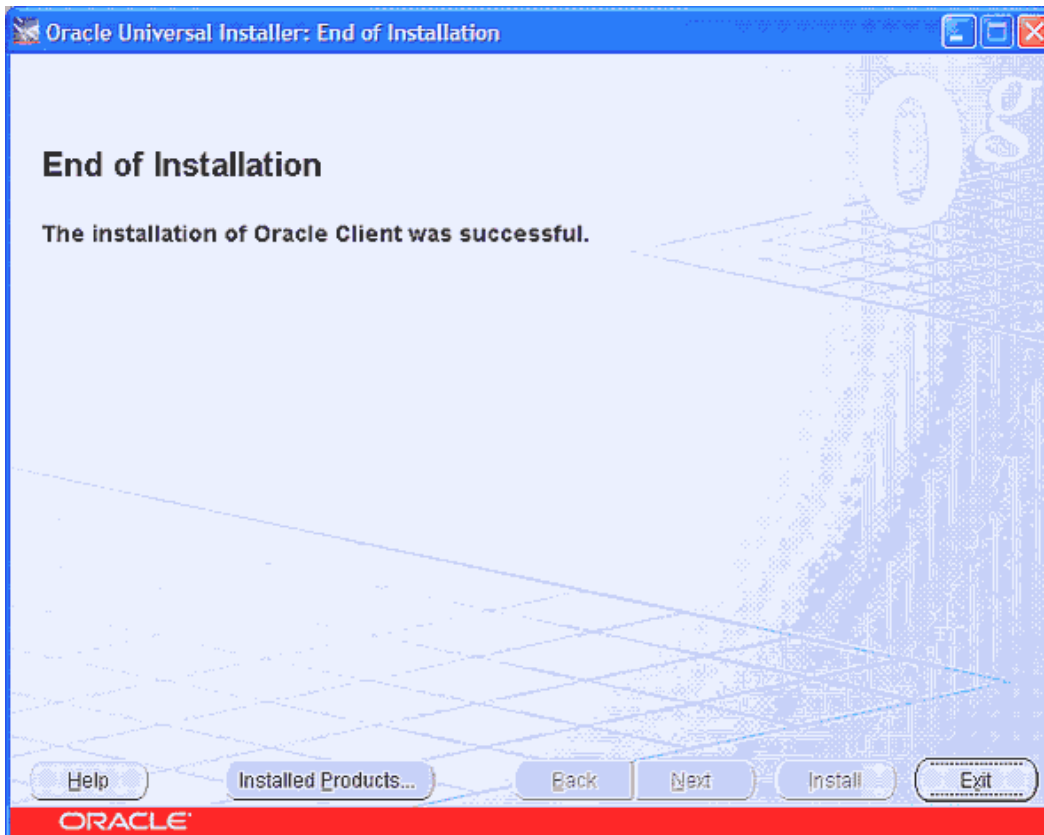

.39




.40


## 1.4.

INST\_ASM

BUHKLDR.

\* MainAsm.exe –

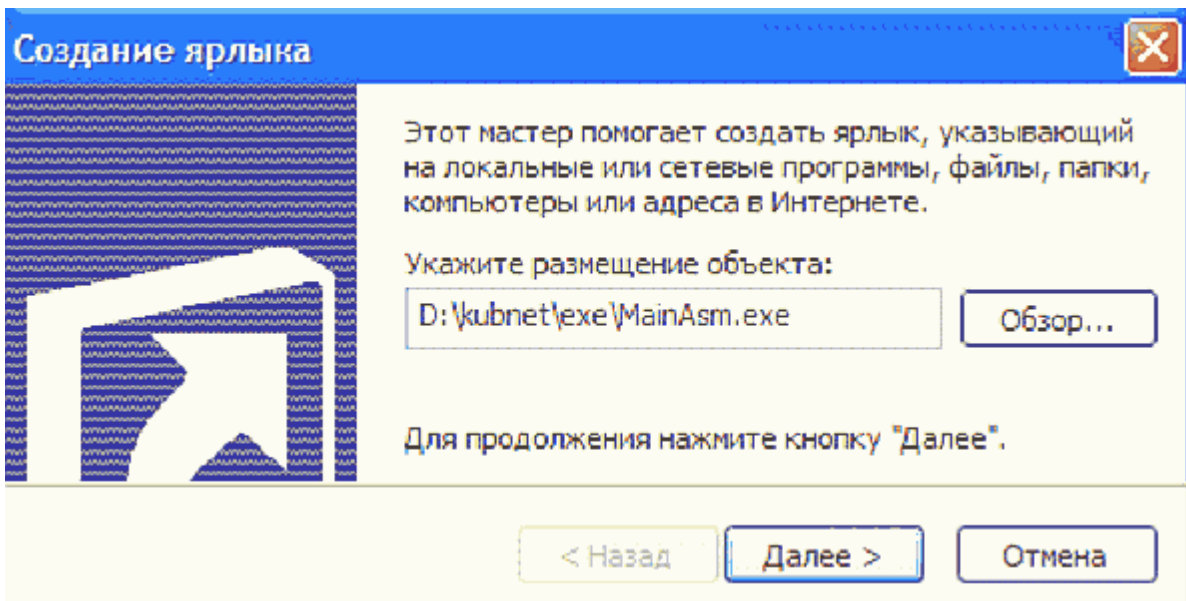


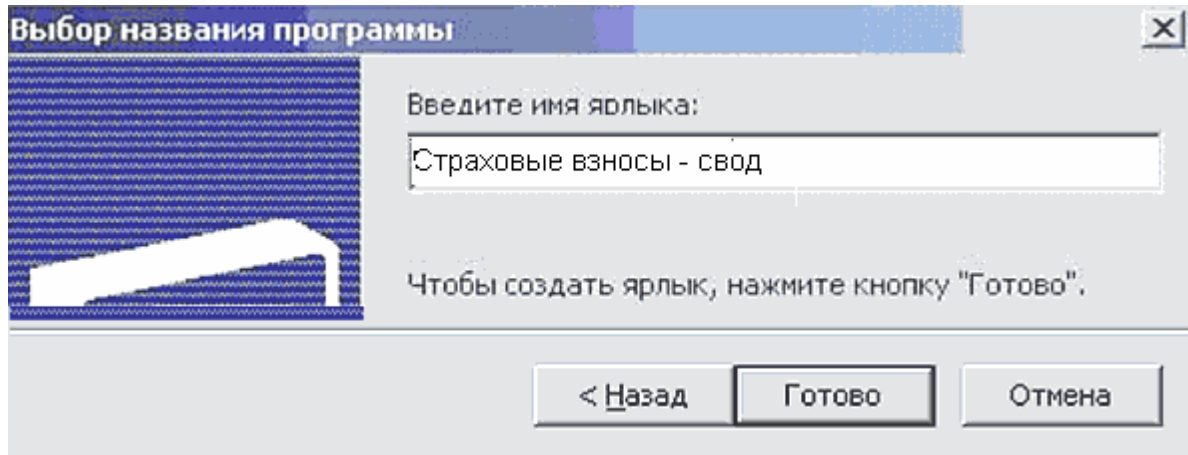

## 1.5.

- « - » :
1. ( —
  - ADM\_ASM\_ROLE, —
  - USR0\_ASM\_ROLE) —
  2. ,
  - Oracle.
  3. Oracle,
  - Oracle
- ADM\_ASM\_ROLE, —
- USR\_ASM\_ROLE, — USR0\_ASM\_ROLE.
- « - » :
1. Oracle,
- « - » :
1. ( —
  - ADM\_ASM\_ROLE, —
  - USR0\_ASM\_ROLE) —
  2. (ADM\_ASM, USR\_ASM, USR0\_ASM).


MainAsm.exe c

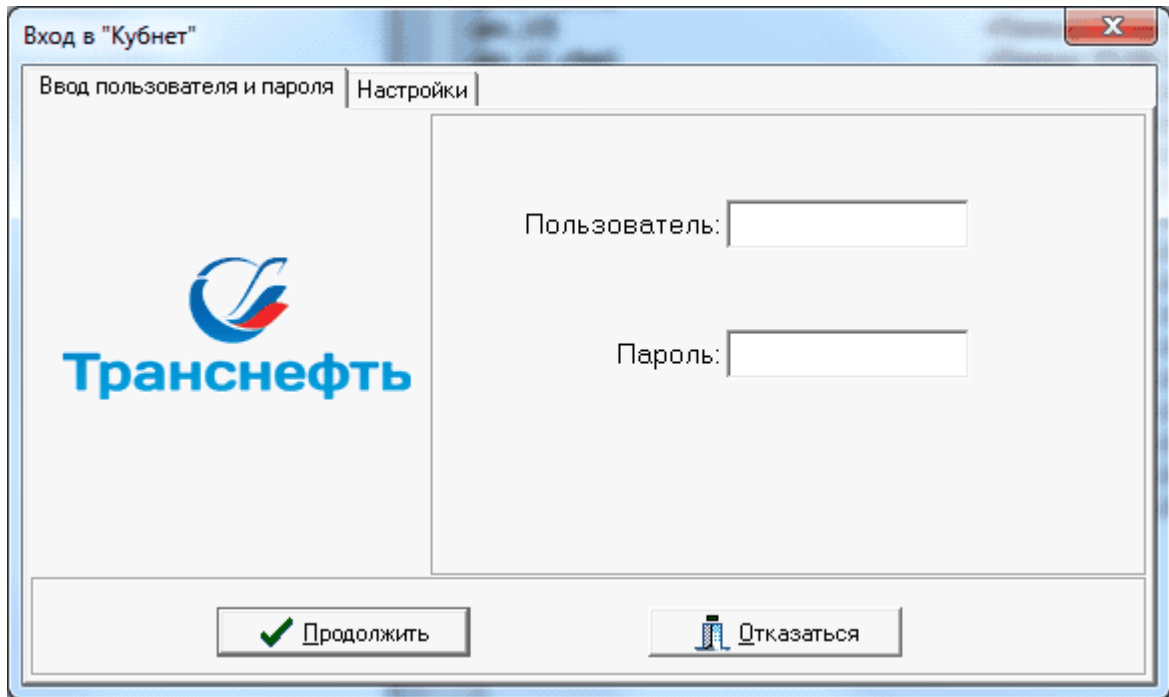


ORACLE.


ORACLE.

«Caps Lock».

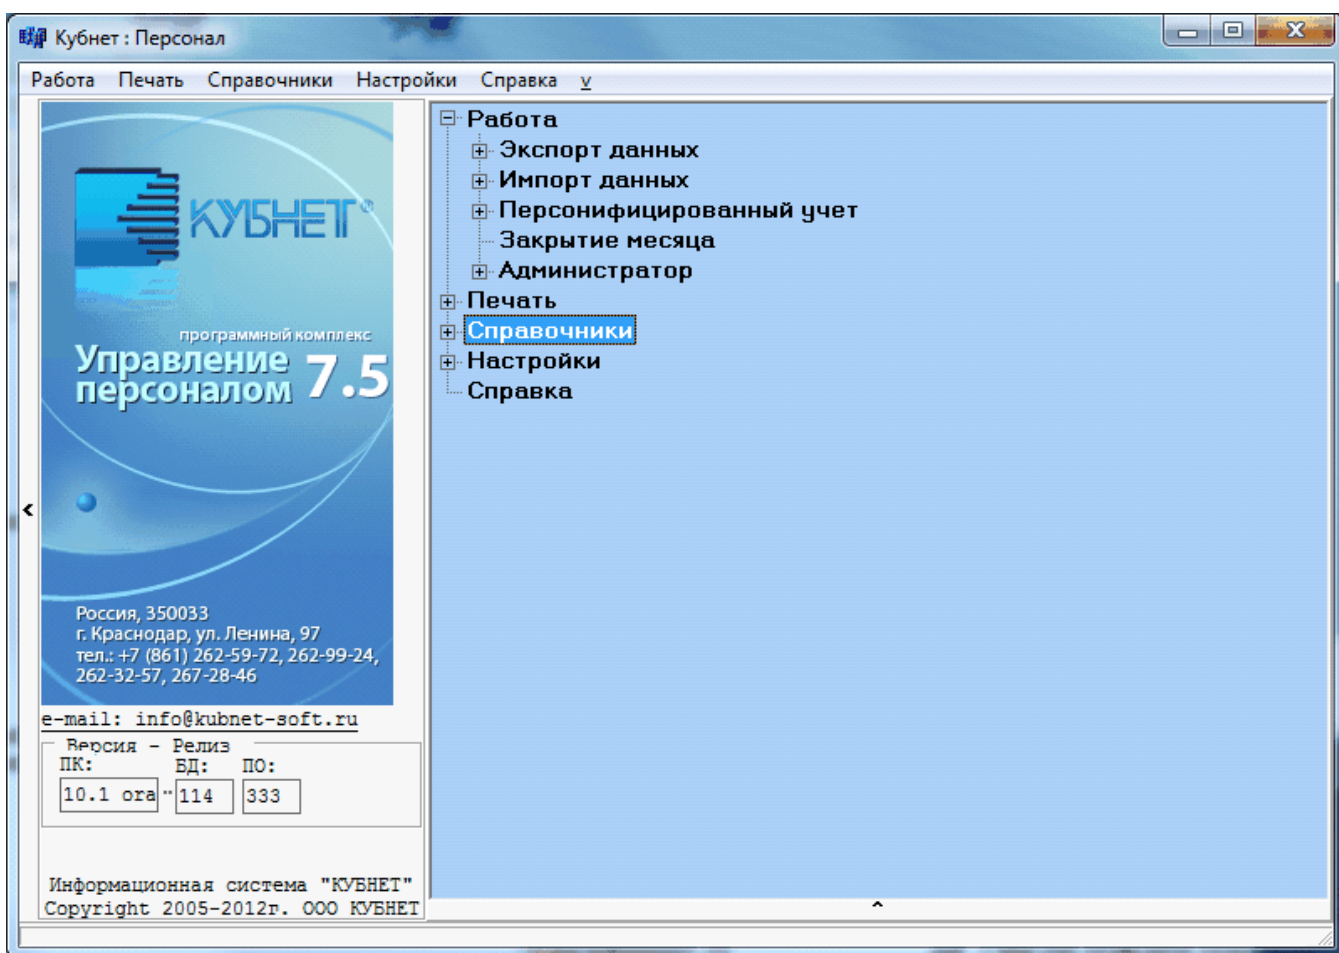

«OK»

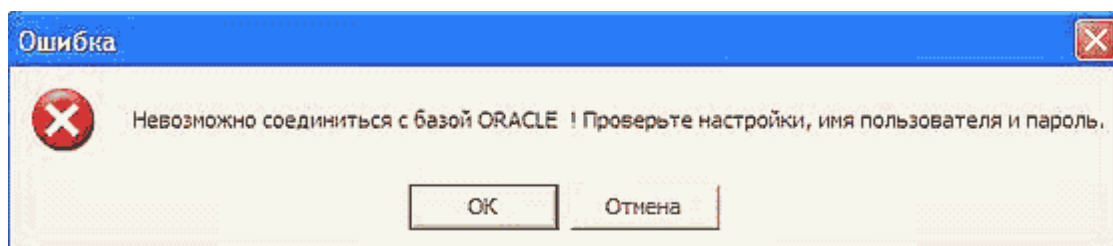

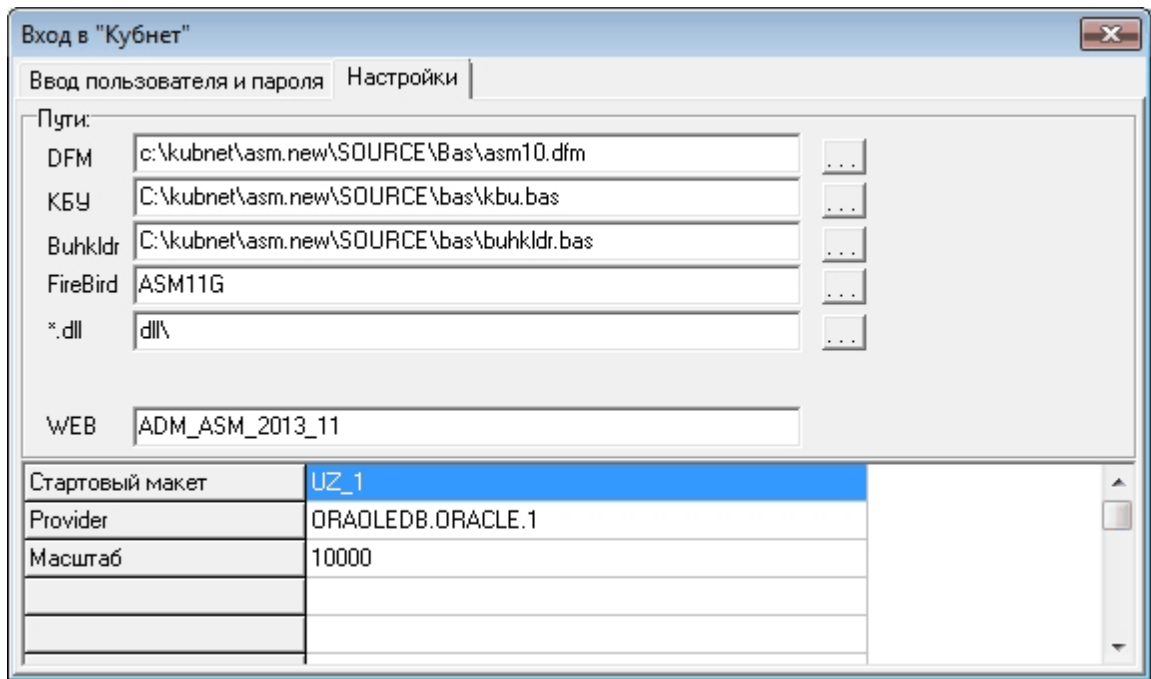

- », [ « ] \ network  
 \ADMIN\tnsnames.ora, [ ] .  
 . [ ] - . .5, [ ] - . .13  
 tnsnames.ora.

```

# TNSNAMES.ORA Network Configuration File:
D:\oracle\ora92\network\admin\tnsnames.ora
# Generated by Oracle configuration tools.
TESTASM =
(DESCRIPTION =
  (ADDRESS_LIST =
    (ADDRESS = (PROTOCOL = TCP)(HOST = testsrv)(PORT =
1521))
  )
  (CONNECT_DATA =
    (SERVICE_NAME = testasm)
  )
)

```

«TESTASM =>( )

